

Epson USA PowerLite 2265U

EPSON USA POWERLITE 2265U



The standard portable PowerLite 2265U LCD projector from Epson USA has 5500 ANSI lumens, a contrast ratio of 15000:1 and a WUXGA 1920 x 1200 resolution. The manufacturer, Epson USA, states that the lamp has a lifespan of 10,000 hours, which is over 13.7 years if used for two hours a day. Files can be played directly using the integrated media player. Horizontal and vertical keystone correction makes image setup a breeze. A picture width of up to 753 cm is possible because the projector has 5500 ANSI lumens. The projector can create rooms with low light with a smaller picture width; we would recommend a maximum of 502 cm. A smartphone with an MHL connection can be connected directly to the MHL/HDMI port for 1080p / 60 Hz screen mirroring. Furthermore, the projector can play 1080P without any problems. The model was built by Epson USA in 2017 and is no longer up to date, but it is still very popular in our projector database.



3 x 0,76" LCD TFT Panel

WUXGA 16/9 Liquid Crystal Display

Projector	5500 / 3800 im Eco Mode	Screen	2444 Lux (bei 200 cm Screen)
Contrast	15000:1 full on/off		15000:1 full on/off
Black Level Offset	0,3667 min. Lumen		0,163 min. Lumen

WUXGA 1920 x 1200

2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: jpg bmp gif png pdf avi Motion JPEG)

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

300W Lamp

Article Nr.: ELPLP95

5000 h. 10000 in Eco Mode

7,14% / 0,03 €


Manual

Manual 1,62

F=1,5-2,0 f=23-38,4 mm

1,38-2,28:1

16W

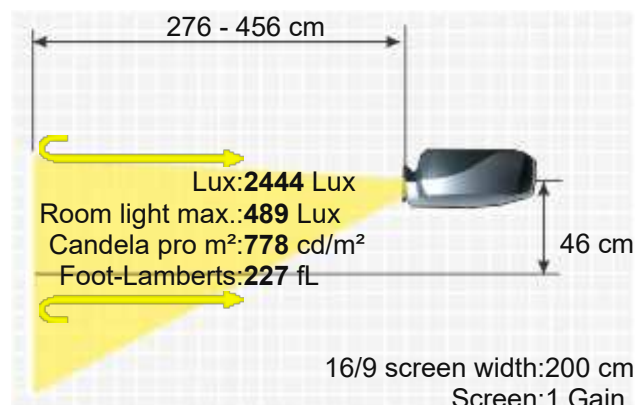

16/9 screen width: 200 cm
Screen: 1 Gain

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections	2 x HDMI mit MHL in
	D-sub 15pin in und out
	Cinch Video in
	Cinch Stereo in
	Mini Jack Audio in und out
	USB Typ A,B in
	RS232C Din 9 pin in
	RJ45 in
	HDBaseT in
Ceiling Mounting	Yes, is possible.
Power	450 / 360W in Eco Mode
Size WxHxD	377 x 110 x 291 mm (14,8"x4,3"x11,5") 12,07 L/dm³
Operating Noise	39 / 29 dB in Eco Mode

Weight	4,90 kg / 8,82 lbs.
Keystone	Vert.: +/-30°
	Hori.: +/-30°


Illumination	-
--------------	---

Frequenz	-
----------	---

Foot-Lamberts	227 fL / max. 753 cm screen width
	778 cd/m²

- Full HD 1080P compatible
- Integrated Mediaplayer
- Blackboard Modus
- User logo
- Eco Mode
- Kensington Slot
- sRGB
- Password protection
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Crestron®-Software compatible.

Screen Mirroring	über HDMI MHL
------------------	---------------

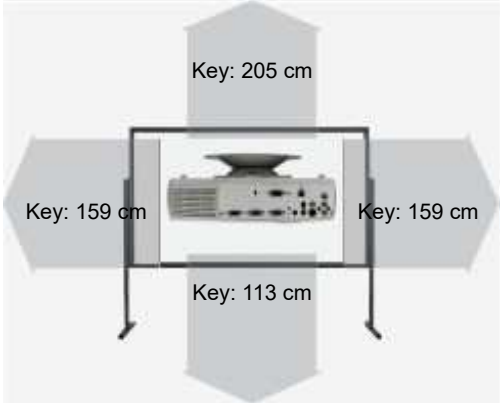

Optional accessories

	Nackte Osram Lampe	NLMP24640	88,64 €
	Lampe Ruby	Ruby-LMP24640	138,43 €
	Lampe Original	ELPLP95 / V13H010L95	139,53 €
	Kompatible Lampe	LMP-K24114	90,19 €
	Luftfilter Kompatibel	Alternative zu:ELPAF41 / V13H134A41	22,31 €
	Fernbedienung Original	2177023	26,89 €
	Luftfilter Original	ELPAF41 / V13H134A41	37,19 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status	2017 Discontinued (EOL) // Last update of the data: 2025-04-07 Created: 2025-04-02 10:12:24
--------	--

Data				
------	--	--	--	--

More Details



HCinema

<https://www.projector-database.com/pro/epsonusapowerlite2265u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.