

Epson USA PowerLite S39

EPSON USA POWERLITE S39



Brief Introduction

Beta 2.5

With the PowerLite S39, manufacturer Epson USA offers an LCD projector with SVGA 800 x 600 resolution and a contrast of 15000:1. The manufacturer specifies a lamp life of 10000 hours, which is over 13.7 years with a daily viewing time of 2 hours. The integrated media player can play files directly. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. A picture width of up to 500 cm is possible. However, the image should be smaller in room light. We recommend max. 333 cm. Video signals 1080P are also no problem for the projector. The model was built by Epson USA in 2017 and is no longer current.

Display Type

3 x 0,55" LCD TFT Panel mit MLA
SVGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen Contrast Black Level Offset

3300 / 2050 im Eco Mode
15000:1 full on/off
0,2200 min. Lumen
1100 Lux (200 cm Screen width)
15000:1 full on/off
0,073 min. Lumen

Resolution

SVGA 800 x 600
480.000 Pixel
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Video Modes

Media player formats: .JPEG .bmp .gif .png .avi

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Life

210W UHE Lamp
Article Nr.: ELPLP96 / V13H010L96
6000 h. 10000 h. in Eco Mode

Operating Costs

5% / 0,02 €

Focus

Manual

Zoom

No Zoom

Objective

F=1,44 f=16,7mm

Throw Ratio


1,49:1

Audio

-

Connections

HDMI in
D-sub 15pin in und out
Cinch Video in
2 x YUV in
S-Video in

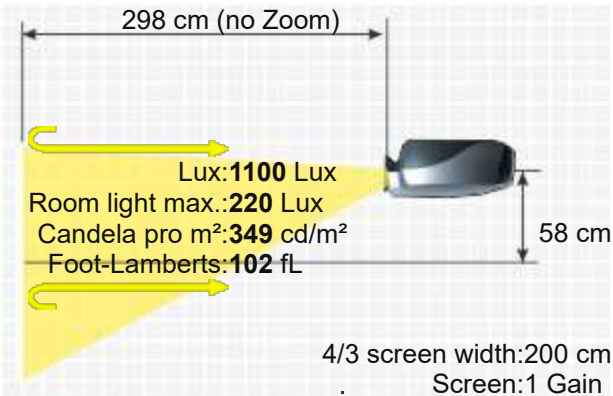

Ceiling Mounting

Power

Size WxHxD

Operating Noise

2 x Mini Jack Audio in und out

USB Typ A,B in

Yes, is possible.

309 / 227W in Eco Mode

302 x 92 x 249 mm (11,9"x3,6"x9,8") 6,92 L/dm³

-

Weight

Keystone

2,70 kg / 4,41 lbs.

Vert.: +/-30° automatisch

Hori.: +/-30°

Illumination

-

Frequenz

-

Foot-Lamberts

102 fL / max. 500 cm screen width

349 cd/m²

- Features
- Full HD 1080P compatible

■ Direkt Power Off

■ Integrated Mediaplayer

■ Eco Mode


■ Automatic and manual vertical keystone correction

■ Optional Wi-Fi network compatible.

■ Digital zoom,

Screen Mirroring

-

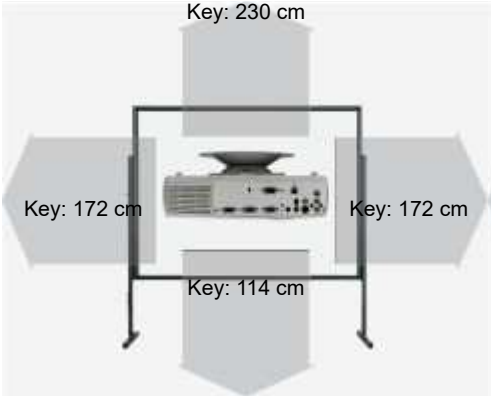

Optional accessories			
	Nackte Philips Lampe	NLMP25076	70,82 €
	Lampe Ruby	Ruby-LMP25076	83,03 €
	Lampe Original	ELPLP96 / V13H010L96 / ELPLP97 / V13H010L97	101,45 €
	Kompatible Lampe	LMP-K22619	72,91 €
	Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	2181788	24,68 €
	Einzelner Luftfilter Original	ELPAF32 / V13H134A32 / 1557759	27,07 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status

2017 Discontinued (EOL) // Last update of the data: 2026-05-05

Created: 2017-12-23 17:42:25



More Details



HCinema

<https://www.projector-database.com/pro/epsonusapowerlites39-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.