

Everest CR521Xi

EVEREST CR521Xi



The Everest CR521Xi LCD projector has 3300 Ansi lumens, a contrast of 10000:1 and an XGA 1024 x 768 resolution. The manufacturer specifies a lamp life of 10000 hours, which converts to over 13.7 years at 2 hours per day. The horizontal and vertical keystone correction allows the projector to be positioned very freely. The projector will be able to illuminate a picture width of 500 cm well. If room light is available, however, the image width should ideally not exceed 333 cm. The projector offers an interactive whiteboard function for interactive training courses and presentations. A smartphone with MHL connection can be connected directly to the MHL/HDMI port and transmit a 1080p / 60 Hz image mirroring (screen mirroring) while the smartphone is being charged at the same time. Furthermore, the projector can play 1080P without any problems. The model was built by Everest in 2017 and is no longer current, but is still a popular projector in our database.

Brief Introduction

Beta 2.5

Display Type

3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

3300

1100 Lux (bei 200 cm Screen)

Contrast

10000:1 full on/off

10000:1 full on/off

Black Level

0,3300 min. Lumen

0,11 min. Lumen

Offset

-

Resolution

XGA 1024 x 768
786.432 Pixel
WUXGA 1920 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Application

Whiteboard | Training and company presentations, as well as product presentations.

Light Source

218W Lamp

Light Life

4000 h. 10000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=1,8 f=6,08mm

Throw Ratio

0,47:1

Audio

1 x 10W

Connections

2 x HDMI mit MHL in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
USB Typ A, B in
RS232C Din 9 pin in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

RJ45 in
Yes
270W
347 x 142 x 341 mm (13,7"x5,6"x13,4") 16,8 L/dm³
38,9 / 34,9 dB in Eco Mode

Weight
Keystone
Illumination

4,00 kg / 8,82 lbs.
Vert.: +/-30°
Hori.: +/-15°
-

Frequenz

H-sync: 15-100 kHz
V-sync: 48-85 Hz

Foot-Lamberts

102 fL / max. 500 cm screen width
349 cd/m²


Features

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Short-throw projector
- Whiteboard function

Status

2017 Discontinued (EOL) // Last update of the data: 2023-09-20

Data

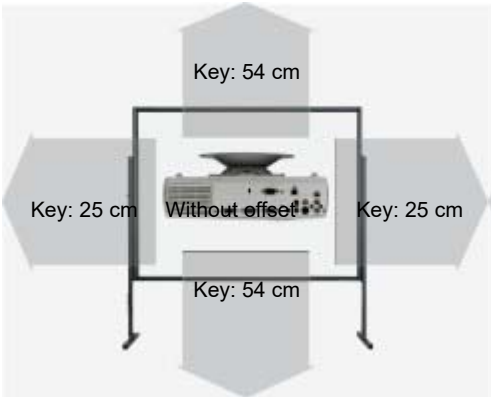

More Details



HCinema

<https://www.projector-database.com/pro/everestcr521xi-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.