

Hitachi CP S235/W

HITACHI CP S235/W



Brief Introduction

Beta 2.5

A brief introduction to the Hitachi CP S235/W. The standard portable LCD projector has an SVGA 800 x 600 resolution and a contrast of 300:1. 1600 Ansi lumens ensure that a picture width of 348 cm is also possible. However, if room light is available, the picture should be max. 232 cm wide. The model was built by Hitachi in 2004 and is no longer current.

Display Type



3 x 0,55" LCD TFT Panel mit MLA

SVGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

1600 / 1300 im Eco Mode

518 Lux (bei 203 cm Screen)

Contrast

300:1 full on/off

300:1 full on/off

Black Level

5,3333 min. Lumen

1.744 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

UXGA 1600x1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 576p, 480p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

160W UHP Lamp

Articel Nr.: DT00621

Light Life

2000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,6-1,8 f=16,8-20,2 mm

Throw Ratio

1,5-1,8:1

Audio

1W Mono

Connections

D-sub 15pin in und out

YUV in

Cinch Video in


Cinch Stereo in

S-Video in

Mini Jack

RS232C

USB Typ B

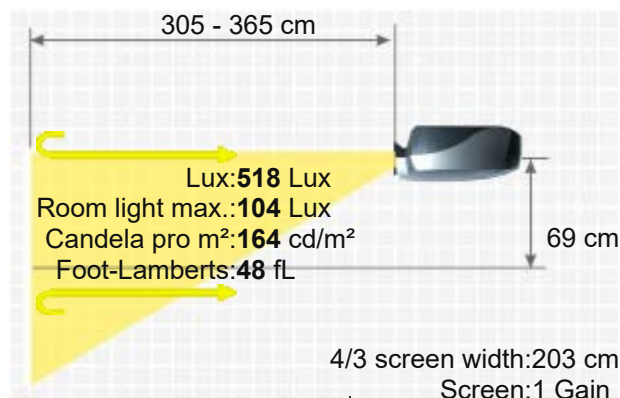



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
240W
332 x 92 x 254 mm (13,1"x3,6"x10") 7,76 L/dm³
34 / 29 dB in Eco Mode

Weight
Keystone
Illumination

3,05 kg / 6,61 lbs.
Vert.: +/-15°
-

Frequenz

H-sync: 31,5-91 kHz
V-sync: 56-120 Hz

Foot-Lamberts

48 fL / max. 348 cm screen width
164 cd/m²

Features

- Freeze
- Blank (Black screen button)
- Eco Mode
- Kensington Slot
- Gamma correction
- Remote control with mouse control
- Overscan adjustable
-

Optional

Lamp ruby	Ruby-LMP1741
Lamp original	DT00621
Compatible lamp	LMP-K1741
Remote control original	HL02881- R016F / HL03032 - R017H / HL02483
Air filter original	NJ08292

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d1741>
2004 Discontinued (EOL) // Last update of the data: 2023-08-30

Data



More Details



HCinema

<https://www.projector-database.com/pro/hitachicps235-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

