

i3-Technologies i3PROJECTOR 2402W



The i3-Technologies i3PROJECTOR 2402W 3D DLP projector has 2800 Ansi lumens, a contrast of 8000:1 and a WXGA 1280 x 800 resolution. Thanks to the short-throw projection ratio of just 0.35:1, the projector is also not distracting in the room. For a 2m wide image, the projector only needs to be 70 cm away from the screen. The projector is equipped with a microphone jack plug and 10W speakers, so no additional speakers are required for presentations or training sessions. Even 1080P video signals and 3D are no problem for the projector. The model was built by i3-Technologies in 2013 and is no longer current.



1 x 0,65" DC3 DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Projector	2800	Screen	1120 Lux (bei 200 cm Screen)
	8000:1 full on/off		8000:1 full on/off
	0,3500 min. Lumen		0,14 min. Lumen

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray (komprimiert) | 4K-UHD Blu-ray

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Short Distance | Medium screen width or rooms with little light, max. 100 lumens.

240W UHP Lamp

Articel Nr.: SP.8UP01GC02 /

SP.8UP01GC01 / BL-FP280I

3000 h. 4000 h. in eco Mode

-

Manual

No Zoom

F=2,6 f=7,35mm

0,35:1

10W

HDMI 1.4a in
2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
Cinch Stereo in
Mini Jack Audio in und out



Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Disc Recognition

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom


Objective

Throw Ratio

Audio

Connections

	RJ45 in
	RS232C Din 9 pin in
	12V Trigger out
	Mikrofon in
Ceiling Mounting	Yes
Power	345 / 285W in Eco Mode
Size WxHxD	357 x 231 x 367 mm (14,1"x9,1"x14,4") 30,27 L/dm³
Operating Noise	30 dB in Eco Mode

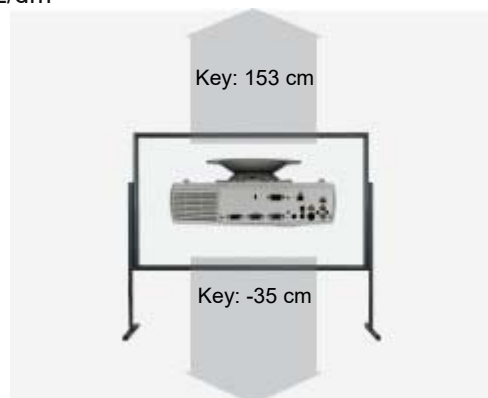

Weight	7,50 kg / 16,53 lbs.
Keystone	Vert.: +/-40°
Illumination	85%
Frequenz	H-sync: 15,3-91,1 kHz V-sync: 24-85 Hz
Foot-Lamberts	104 fL / max. 538 cm screen width 356 cd/m²

	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Eco Mode ■ Kensington Slot ■ Password protection ■ Remote control with laser pointer ■ Lan network compatible. ■ Short-throw projector ■ Crestron®-Software compatible.
--	--

Status	2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	Created: 2021-05-20 13:51:10

More Details



HCinema

<https://www.projector-database.com/pro/i3technologiesi3projector2402w-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.