

ASK Proxima C500



ASK PROXIMA C500



Brief Introduction

Beta 2.5

A brief introduction to the ASK Proxima C500. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 1000:1. The projector also offers a lens shift function, which makes setting up the image childs play. An image width of up to 616 cm is possible as the projector has 5000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 411 cm. Playing 1080P is also no problem for the projector. The model built in 2008 is no longer offered by ASK Proxima.

Display Type

3 x 0,8" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

5000

1667 Lux (bei 200 cm Screen)

Contrast

1000:1 full on/off

1000:1 full on/off

Black Level

5,0000 min. Lumen

1,672 min. Lumen

Lens shift

Vert.: +40% -0% Hori.: +/-10%

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

275 / 220W UHB Lamp

Articel Nr.: SP-LAMP-038

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

5,18% / 0,17 €

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,74-2,06

Throw Ratio

1,5-1,8:1

Audio

2 x 4W Stereo

HDMI 1.3 in

D-sub 15 pin in und out

5 x BNC RGBHV in

YUV in

S-Video in

Cinch Video in

Cinch Stereo in

Mini Jack Audio in

RJ45 in

Ceiling Mounting

Yes

Power

-

Size WxHxD

420 x 129 x 314 mm (16,5"x5,1"x12,4") 17,01 L/dm³

Operating Noise

32 / 30 dB in Eco Mode

Weight

7,10 kg / 15,65 lbs.


Keystone

Vert.: +/-40°

Hori.: +/-20°

Illumination

-

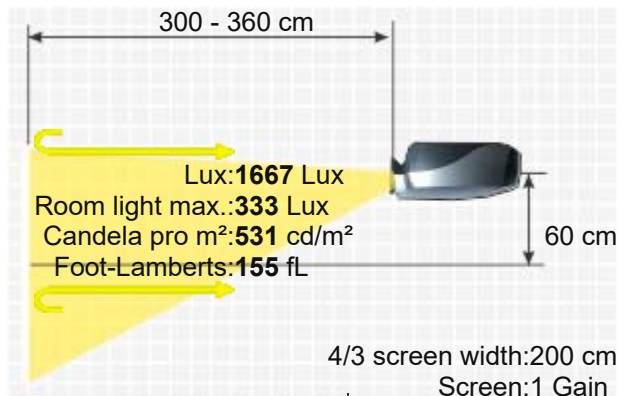

Frequenz

H-sync: 15-91 kHz
 V-sync: 50-120 Hz
 Range max.: 140 MHz

Foot-Lamberts

155 fL / max. 616 cm screen width

- 531 cd/m²

Full HD 1080P compatible

Lens shift Funktion

Freeze

Blank (Black screen button)

Eco Mode

Dynamic iris

Warping

Picture-in-Picture

Remote control with laser pointer

Control via web browser

Lan network compatible.

Overscan adjustable
- | | | |
|----------|---------------------------|---------------|
| | Bulb only | NLMP18501 |
| | Lamp ruby | Ruby-LMP18501 |
| | Lamp original | SP-LAMP-038 |
| Optional | Compatible lamp | LMP-K18501 |
| | Universal Remote original | Fernb-uni-V3 |
| | Air filter original | MU03642 |
| | Ceiling Mount 100-120 | Halterung100 |
- Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n22293>
- | Optional Lenses | | | | | |
|----------------------|-----------|------------|----------|---------|---------|
| Name | Ratio | Distance | Shift V | Shift H | Zoom |
| Zoom Optional Lenses | | | | | |
| Lens 040 | 3.9-7.4:1 | 7.8-14.8 m | 50% | | Manual |
| Lens 039 | 1.9-3.9:1 | 3.8-7.8 m | 50% | | Manual |
| Lens 038 | 1.2-2:1 | 2.4-4 m | 50% | | Manual |
| Fix Optional Lenses | | | | | |
| Lens 037 | 0.8:1 | 1.6 m | 0.0% Fix | | No Zoom |
- Status

2008 Discontinued (EOL) // Last update of the data: 2023-08-04

Data
- More Details
-
- HCinema

<https://www.projector-database.com/pro/askproximac500-en.html>
- Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.
-