

InFocus IN220



INFOCUS IN220



Brief Introduction

Beta 2.5

The InFocus IN220 standard portable 3D DLP projector has 3500 Ansi lumens, a contrast of 17000:1 and an SVGA 800 x 600 resolution. The service life of the lamp is up to 5000 hours, which is over 6.8 years with a daily viewing time of 2 hours. A picture width of up to 515 cm is possible as the projector has 3500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 343 cm. Even 1080P video signals are no problem for the projector. The model was built by InFocus in 2015 and is no longer current.



1 x 0,55" DDP4421 DLP Chip

SVGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

3500

1167 Lux (bei 200 cm Screen)

Contrast

17000:1 full on/off

17000:1 full on/off

Black Level

0,2059 min. Lumen

0,069 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

HDTV 1920 x 1080 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

190W Lamp

Articel Nr.: SP-LAMP-091

Light Life

5000 h. 6000 in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,1

Objective

-

Throw Ratio


1,95-2,15:1

Audio

-

Connections

D-sub 15pin in
Cinch Video in
S-Video in
mini USB
RS232C 9pin in

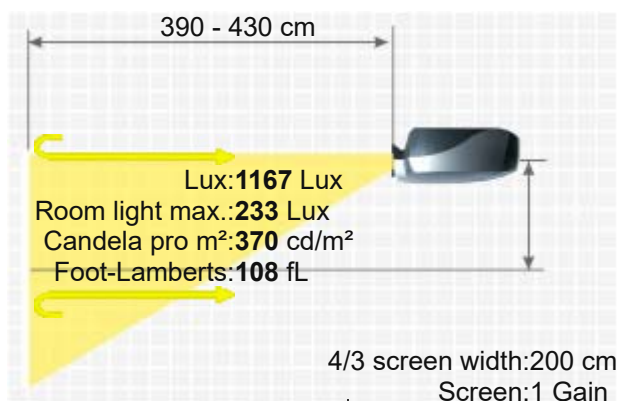



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
225 / 191W in Eco Mode
314,3 x 88,2 x 223,6 mm (12,4"x3,5"x8,8") 6,16 L/dm³
32 / 29 dB in Eco Mode

Weight
Keystone
Illumination

2,35 kg / 5,18 lbs.
Vert.: +/-40°
-

Frequenz

H-sync: 15,3-91,1 kHz
V-sync: 24,85 Hz

Foot-Lamberts

108 fL / max. 515 cm screen width
370 cd/m²

Features

- Full HD 1080P compatible
- Eco Mode
- 6-segment colour wheel


Optional

Remote control original SP.8VH02GC01
Lamp original SP-LAMP-091

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro23195>
2015 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2015-07-16 10:59:14

Data

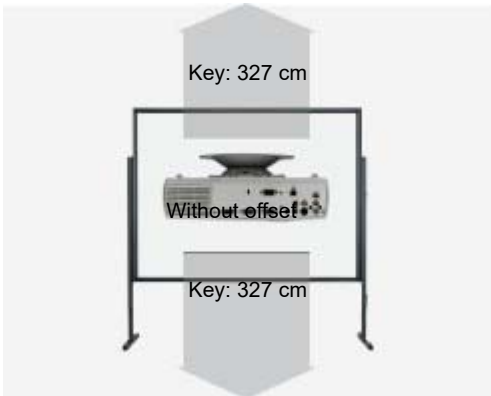

More Details



HCinema

<https://www.projector-database.com/pro/infocusin220-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.