

InFocus Work Big IN38

INFOCUS WORK BIG IN38



Brief Introduction

Beta 2.5

A brief introduction to the InFocus Work Big IN38. The DLP projector has an XGA 1024 x 768 resolution and a contrast of 2000:1. An image width of up to 515 cm is possible as the projector has 3500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 343 cm. The model was built by InFocus in 2007 and is no longer current.

Display Type



1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3500 / 2800 im Eco Mode

1167 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

Offset

1,7500 min. Lumen

0,584 min. Lumen

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

300 / 250W im Eco Mode Lamp

Light Life

Artikel Nr.: SP-LAMP-034

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,3-2,7 f=23,6-28,25 mm

Throw Ratio

1,6-2,0:1

Audio

2W Mono

Connections

DVI M1DA ib


D-sub15 pin in und out

YUV in

S-Video in

Cinch Video in

Mini Jack Audio in und out

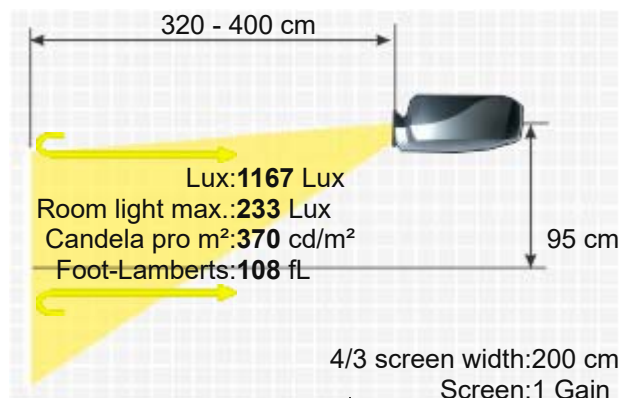



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
380 / 330W in Eco Mode
309 x 102 x 229 mm (12,2"x4"x9") 7,22 L/dm³
34 / 31 dB in Eco Mode

Weight
Keystone
Illumination

3,20 kg / 7,05 lbs.
Vert.: +/-15°
95%

Frequenz

H-sync: 31-69 kHz
V-sync: 50-85 Hz

Foot-Lamberts

108 fL / max. 515 cm screen width
370 cd/m²

Features

- Freeze
- Blank (Black screen button)
- Eco Mode
- Kensington Slot
- Password protection
- Overscan adjustable

Optional

Bulb only	NLMP17912
Lamp ruby	Ruby-LMP17912
Lamp original	SP-LAMP-034
Compatible lamp	LMP-K17912
Universal Remote original	Fernb-uni-V3
Ceiling Mount 100-120	Halterung100

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n17912>
2007 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/infocusin38-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

