

JVC DLA-Z1

JVC DLA-Z1



The DLA-Z1 3D laser DILA projector from JVC has 3000 Ansi lumens and a UHD (4K+2K) 4096 x 2160 resolution. Thanks to the laser technology, the projector has a light life of up to 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. With the lens shift function, the projector can be positioned very freely. An image width of up to 366 cm is possible. However, the image should be smaller in room light. We recommend max. 244 cm. Playback of 1080P and 4K as well as 3D is also no problem for the projector, meaning that all Blu-ray formats currently available can be recognized by the projector. The model was built by JVC in 2016 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,69" D-ILA Chip

UHD 19/10 Direct-Drive Image Light Amplification (D-ILA)

Ansi-Lumen

Projector 3000

Screen 1422 Lux (bei 200 cm Screen)

Contrast

-

-

Black Level

-

-

Lens shift

Vert.: +/-100% Hori.: +/-43%

Resolution

UHD (4K+2K) 4096 x 2160

8.847.360 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray (60p)

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

High-End Homecinema | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

Laser

Light Life

20000 h.

Operating Costs

0,00 € Laser

Focus

Powered

Zoom

Powered 2

Objective

-

Throw Ratio

1,4-2,8:1

Audio


-

Connections

2 x HDMI 2.0 HDCP 2.2 in


RJ45 in

RS232C



Ceiling Mounting

Yes

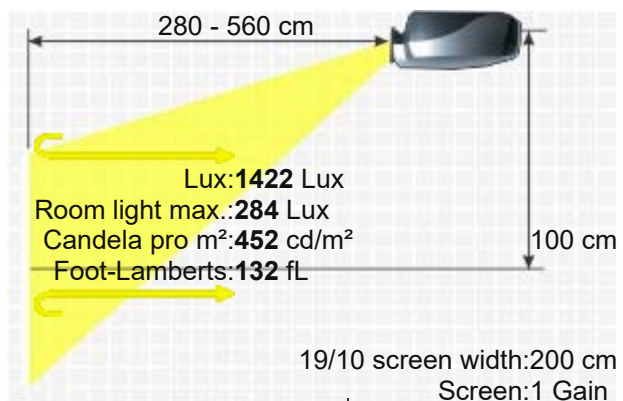

Power 750W
Size WxHxD 500 x 235 x 720 mm (19,7"x9,3"x28,3") 84,6 L/dm³
Operating Noise -



Weight 37,50 kg / 81,57 lbs.
Keystone -
Illumination -

Frequenz -

Foot-Lamberts 132 fL / max. 366 cm screen width
452 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Lens shift Funktion
 - High Dynamic Range (HDR)
 - Lan network compatible.
 - ISF-licensed.

Status 2016 Discontinued (EOL) // Last update of the data: 2024-10-02
Created: 2016-09-07 10:15:19

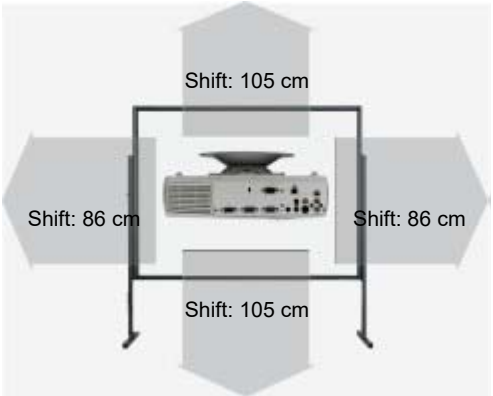

More Details



HCinema

<https://www.projector-database.com/pro/jvcdlaz1-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.