

ASK Proxima L2050



Brief Introduction

Beta 2.5

The L2050 3D LED DLP has 500 Ansi lumens, a contrast of 3000:1 and a WXGA 1280 x 800 resolution. The lifespan of the LEDs is 30000 hours, which is equivalent to over 20.5 years at 4 hours per day. Due to the brightness of 500 Ansi lumens, a picture width of 227 cm is possible. In room light, the picture should be max. 151 cm wide. The model was built by ASK Proxima in 2012 and is no longer current.



1 x 0,45" DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

500

200 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off

3000:1 full on/off

Black Level

0,1667 min. Lumen

0,067 min. Lumen

Offset

-

Resolution

WXGA 1280 x 800

1.024.000 Pixel

SXGA 1280 x 1024 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

Light Source

LED PT54

Light Life

30000 h.

Operating Costs

0,00 € LED

Focus

Manual

Zoom

No Zoom

Objective

-

Throw Ratio

-

Audio

1 x 2W

Connections

HDMI in
D-sub 15pin in
Cinch Video in
S-Video in
Mini Jack Audio in und out
USB Typ A in
SD-Card Slot in

Ceiling Mounting

Yes

Power

90W

Size WxHxD

240 x 42 x 160 mm (9,4"x1,7"x6,3") 1,61 L/dm³

Operating Noise

-

Weight


1,50 kg / 3,31 lbs.

Keystone

Vert.: +/-40°

Illumination

-

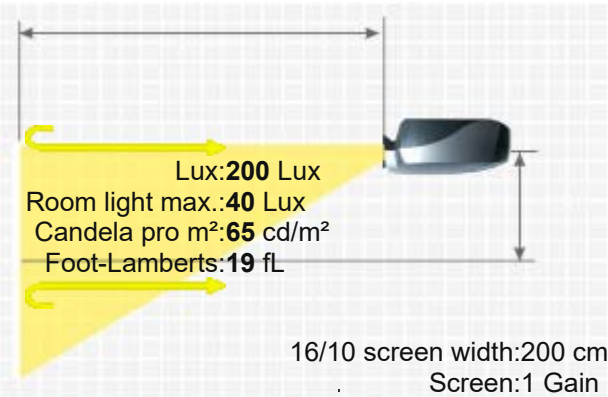

Frequenz	H-sync: 15-90 kHz V-sync: 50-85 Hz
Foot-Lamberts	19 fL / max. 227 cm screen width 65 cd/m²
Features	-
Status	2012 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

<https://www.projector-database.com/pro/askproximal2050-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.