

JVC LX-WX50

JVC LX-WX50



Brief Introduction

Beta 2.5

The JVC model LX-WX50 is a DLP projector with WXGA 1280 x 800 resolution and a contrast of 4000:1. The projector also offers a lens shift function, which makes setting up the image childs play. The projector is equipped with a microphone jack and 10W speakers, so no additional speakers are required for presentations or training sessions. Thanks to the brightness of 5000 Ansi lumens, a picture width of 718 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 479 cm). It is also Full HD 1080P and 3D compatible. The model was built by JVC in 2016 and is no longer current.

Display Type

1 x 0,65" DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

5000
2000 Lux (bei 200 cm Screen)

Contrast

4000:1 full on/off
4000:1 full on/off

Black Level

1,2500 min. Lumen
0,5 min. Lumen

Lens shift

Vert.: +57,5% --55%

Resolution

WXGA 1280 x 800
1.024.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Life

370W NSH Lamp
Articel Nr.: PK-L3715UW

Operating Costs

h.

-

Focus

Manual

Zoom

Manual 1,59

Objective

F=2,45-3,07 f=15,75-25,10 mm

Throw Ratio


1,12-1,79:1

Audio

2 x 10W

Connections

2 x HDMI 1.4a in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
Mini Jack Audio in und out
USB Typ B in

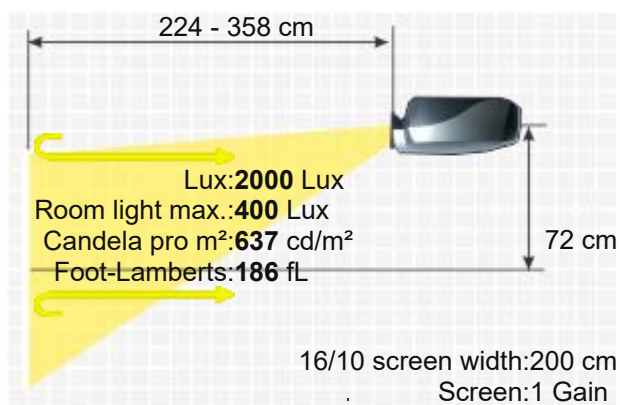

RS232C Din 9 pin in
RJ45 in
12V Trigger out
Mikrofon in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
594W
415 x 116 x 276 mm (16,3"x4,6"x10,9") 13,29 L/dm³
34 dB in Eco Mode

Weight
Keystone
Illumination

4,90 kg / 10,8 lbs.
-
-

Frequenz

-

Foot-Lamberts

186 fL / max. 718 cm screen width
637 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Lan network compatible.
- Crestron®-Software compatible.

Status

2016 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2016-05-13 10:53:39

Data



More Details



HCinema

<https://www.projector-database.com/pro/jvclxwx50-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.