

LG Hecto



LG HECTO



The LG Hecto short-throw laser DLP projector has 2000 Ansi lumens, a contrast of 10000000:1 and an HDTV 1920 x 1080 resolution. Due to the laser, the projector is specified with 25000 hours of light life, which is over 17.1 years with a daily viewing time of 4 hours. Including an integrated media player with which files can be played directly. With a projection ratio of just 0.23:1, this projector never gets in the way. For a 2m wide image, the projector needs to be just 46 cm away from the screen. It is also Full HD 1080P compatible. The projector is very quiet compared to others with an operating noise of 25 decibels. The model was built by LG in 2013 and is no longer current.

Brief Introduction

Display Type

1 x 0,65" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

2000

889 Lux (bei 200 cm Screen)

Contrast

10000000:1 full on/off

10000000:1 full on/off

Black Level

0,0002 min. Lumen

0 min. Lumen

Offset

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Video Modes

Media player formats: .asf .wmv Video VC-1 Advanced Profile, VC-1 Simple and Main Profile Audio WMA Standard, WMA 9 Professional .divx .avi Video DivX3.11, DivX4, DivX5, DivX6, XViD, H.264/AVC, Motion Jpeg Audio MPEG-1 Layer I, II, MPEG-1 Layer III (MP3), Dolby Digital, Dolby Digital Plus, LPCM, ADPCM, DTS .mp4 .m4v .mov Video H.264/AVC, MPEG-4 Part 2 Audio AAC .mkv Video H.264/AVC Audio HE-AAC, Dolby Digital .ts .trp .tp Video H.264/AVC, MPEG-2, VC-1 Audio MPEG-1 Layer I, II, MPEG-1 Layer III (MP3) Dolby Digital, Dolby Digital Plus, AAC .vob Video MPEG-1, MPEG-2 Audio Dolby Digital, MPEG-1 Layer I, II, DVD-LPCM .mpg .mpeg Video MPEG-1 Audio MPEG-1 Layer I, II

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

Application

Short Distance | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

400W Laser

Light Life

25000 h.

Operating Costs

0,00 € Laser

Focus

Manual

Zoom

No Zoom

Objective

-

Throw Ratio


0,23:1


Audio

10W Stereo

Connections

3 x HDMI
D-Sub 15 pin in
YUV in
S-Video in
Cinch Video in
Cinch Stereo in
USB Typ A
RJ45 in

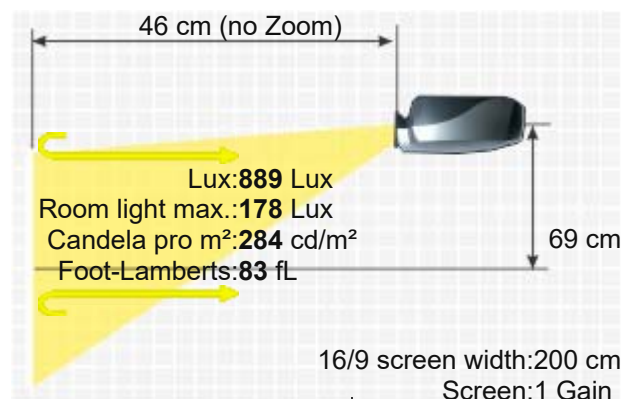



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
400W
546,3 x 145 x 406,06 mm (21,5"x5,7"x16") 32,14 L/dm³
25 / 20 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz

14,00 kg / 30,86 lbs.
-
-
-

Foot-Lamberts

83 fL / max. 454 cm screen width
284 cd/m²

Features

- Full HD 1080P compatible
- Integrated Mediaplayer
- Eco Mode
- Kensington Slot
- Lan network compatible.
- Short-throw projector

Please note
Status
Data

Projektionsverhältnis vom Objektiv ausgehend.
2013 Discontinued (EOL) // Last update of the data: 2024-10-02
Created: 2013-01-04 14:00:44

More Details



HCinema

<https://www.projector-database.com/pro/lghecto-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.