

Avio iP 1U

AVIO iP 1U



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The Avio iP 1U standard portable DLP projector has 2500 Ansi lumens, a contrast of 1500:1 and an XGA 1024 x 768 resolution. An image width of up to 435 cm is possible as the projector has 2500 Ansi lumens. However, if room light is available, the picture should be max. 290 cm wide. The model built in 2009 is no longer offered by Avio.



1 x 0,55" DLP Chip

XGA 4/3 Ti Digital Light Processing Chip

Projector

2500

1500:1 full on/off

1,6667 min. Lumen

Screen

833 Lux (bei 200 cm Screen)

1500:1 full on/off

0,556 min. Lumen

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

260W Lamp

-

-

Manual

Manual 1,2

-

1,014-1,215:1

3W

D-sub 15 pin in und out

S-Video in

Cinch Video in


USB

Yes

370W

290 x 140 x 405 mm (11,4"x5,5"x15,9") 16,44 L/dm³

-

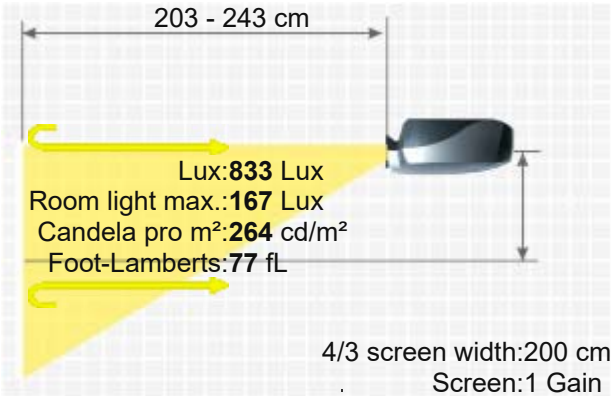

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

5,00 kg / 11,02 lbs.

Vert.: +/-15°

-

H-sync: 24,8-91,1 kHz


V-sync: 50-85 Hz

77 fL / max. 435 cm screen width

264 cd/m²

■ BrilliantColor

2009 Discontinued (EOL) // Last update of the data: 2023-08-04

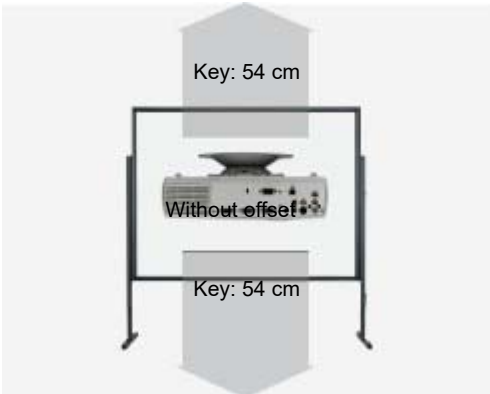



HCinema

<https://www.projector-database.com/pro/avioip01u-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.