

Optoma DS339



OPTOMA DS339



The Optoma model DS339 is a DLP projector with SVGA 800 x 600 resolution and a contrast of 5000:1. The lamp life is specified by the manufacturer as 4500 hours, which converts to over 6.2 years at 2 hours per day. A picture width of up to 444 cm is possible. However, the picture should be smaller in room light. We recommend max. 296 cm. Furthermore, the projector can play 1080P without any problems. The model was built by Optoma in 2012 and is no longer current.

Brief Introduction

Display Type

1 x 0,55" DC3 DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2600

867 Lux (bei 200 cm Screen)

Contrast

5000:1 full on/off

5000:1 full on/off

Black Level

0,5200 min. Lumen

0,174 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

190W Lamp

Articel Nr.: BL-FU190A

Light Life

4500 h. 6500 h. in Eco Mode

Operating Costs

9,52% / 0,04 €

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,41-2,55 f=21,8-23,98 mm

Throw Ratio

1,95-2,15:1

Audio

2W Mono

HDMI 1.3 in

2 x D-sub 15 pin in 1 x out

S-Video in

Cinch Video in

Mini Jack Audio in und out

RS232C

USB Typ B



Ceiling Mounting

Yes

Power


263 / 200W in Eco Mode

Size WxHxD

287 x 88,9 x 236,20 mm (11,3"x3,5"x9,3") 5,96 L/dm³

Operating Noise

34 / 32 dB in Eco Mode

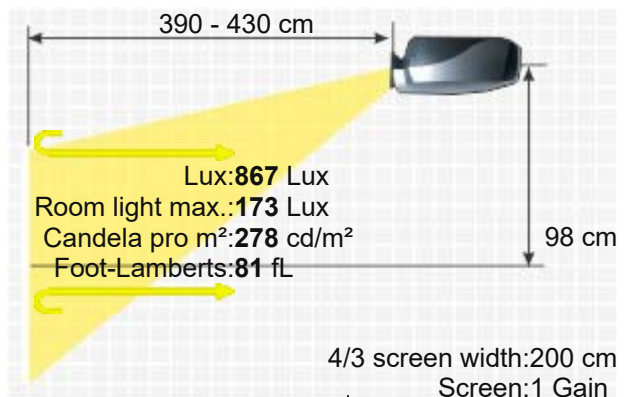

Key: 425 cm

Weight 2,27 kg / 5 lbs.
Keystone Vert.: +/-40°
Illumination 85%

Frequenz H-sync: 15,3-91,1 kHz
V-sync: 24-85 Hz

Foot-Lamberts 81 fL / max. 444 cm screen width
278 cd/m²
■ Full HD 1080P compatible
■ Freeze
■ Eco Mode
Features ■ Kensington Slot
■ BrilliantColor™
■ Remote control with mouse control

Optional Remote control original BR-5041L, BR-5042L
Lamp original BL-FU190A

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro21219>
2012 Discontinued (EOL) // Last update of the data: 2024-05-16



Data



More Details



HCinema

<https://www.projector-database.com/pro/optomads339-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.