

Optoma PRO150S

OPTOMA PRO150S



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

The standard portable PRO150S BrilliantColor DLP has 2800 Ansi lumens, a contrast of 3000:1 and an SVGA 800 x 600 resolution. Due to the brightness of 2800 Ansi lumens, a picture width of 461 cm is possible. In room light, the picture should be max. 307 cm wide. It is also Full HD 1080P compatible. At just 30 decibels, the device is one of the quieter projectors. The model was built by Optoma in 2009 and is no longer current.



1 x 0,55" DC3 DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

2800
3000:1 full on/off
0,9333 min. Lumen

933 Lux (bei 200 cm Screen)
3000:1 full on/off
0,311 min. Lumen

SVGA 800 x 600
480.000 Pixel
UXGA 1600 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.
185W Lamp
Articel Nr.: BL-FU185A /
SP.8EH01GC01
3000 h. 4000 h. in eco Mode

-

Manual

Manual 1,1

F=2,41-2,55 f=21,8-23,98 mm


1,95-2,15:1

2W

2 x D-sun 15 pin in 1 x out
S-Video in
Cinch Video in
Mini jack Audio in und out



Yes

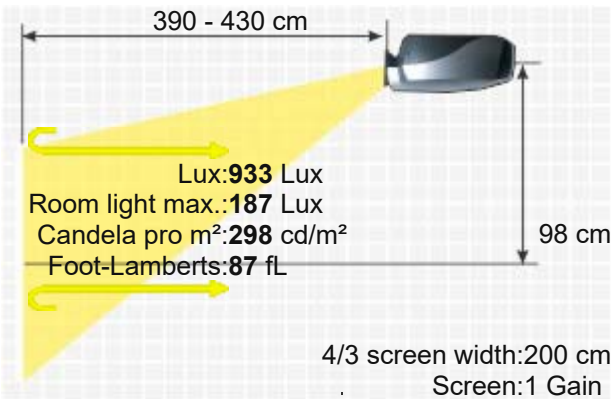

Power 255W
Size WxHxD 286 x 97 x 192 mm (11,3"x3,8"x7,6") 5,33 L/dm³
Operating Noise 30 / 28 dB in Eco Mode

Weight 2,27 kg / 5 lbs.
Keystone Vert.: +/-40°
Illumination 85%

Frequenz H-sync: 15,3-91,1 kHz
V-sync: 24-85 Hz

Foot-Lamberts 87 fL / max. 461 cm screen width
298 cd/m²

- Full HD 1080P compatible
- Freeze
- Blackboard Modus
- Eco Mode
- Kensington Slot
- sRGB
- Digital image shift
- Password protection
- BrilliantColor™
- Overscan adjustable

Features

	Osram bulb only	NLMPe11203
	Lamp ruby	Ruby-LMPe11203
	Lamp original	BL-FU185A / SP.8EH01GC01
Optional	Compatible lamp	LMP-K19112
	Remote control original	BR-3047N / BR-3043N
	Ceiling Mount 100-120	Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19113>
2009 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



Hcinema

<https://www.projector-database.com/pro/optomapro150s-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. Hcinema is not responsible for any errors or omissions contained in product descriptions.

