

Optoma S300

OPTOMA S300



A brief introduction to the S300: The Optoma standard portable 3D BrilliantColor DLP projector offers 2800 Ansi lumens, a contrast of 15000:1 and an SVGA 800 x 600 resolution. The manufacturer Optoma specifies a lamp life of 5000 hours, which is over 6.8 years with a daily viewing time of 2 hours. An image width of up to 461 cm is possible as the projector has 2800 Ansi lumens. However, if room light is available, the image should be max. 307 cm wide. The model was built by Optoma in 2013 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

1 x 0,55" DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2800 933 Lux (bei 200 cm Screen)

Contrast

15000:1 full on/off 15000:1 full on/off

Black Level Offset

0,1867 min. Lumen 0,062 min. Lumen

Resolution

SVGA 800 x 600
480.000 Pixel
UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

3D Compatibility

Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with little light, max. 100 lumens.

Light Life

190W Lamp
Article Nr.: BL-FP190A
5000 h. 6500 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,41-2,55 f=21,8-24,0 mm

Throw Ratio

1,95-2,15:1

Audio


Nein

Connections

D-sub 15 pin in
S-Video in
Cinch Video in
RS232C in

Ceiling Mounting Power

Yes, is possible.
233 / 207W in Eco Mode

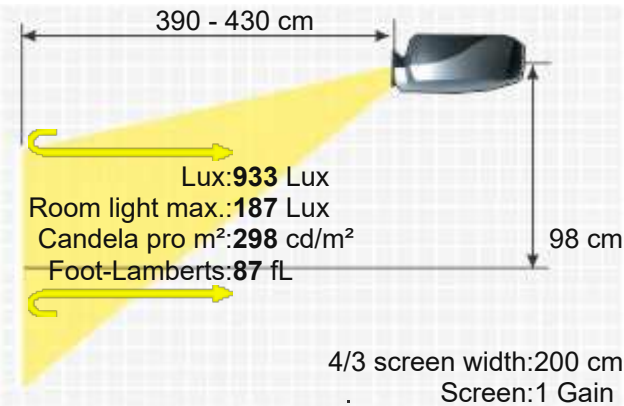

Size WxHxD 286 x 84 x 192 mm (11,3"x3,3"x7,6") 4,61 L/dm³
Operating Noise 28 dB in Eco Mode

Weight 2,13 kg / 4,7 lbs.
Keystone Vert.: +/-40°
Illumination 80%

Frequenz H-sync: 15,3-91,1 kHz
V-sync: 24-85 Hz

Foot-Lamberts 87 fL / max. 461 cm screen width
298 cd/m²
■ Eco Mode
■ Kensington Slot
■ Password protection
■ BrilliantColor™
■ Crestron®-Software compatible.

Screen Mirroring -



Optional accessories

	Nackte Osram Lampe	NLMP21895	53,94 €
	Nackte Osram Lampe	NLMP19656	53,94 €
	Lampe Ruby	Ruby-LMP21895	80,49 €
	Lampe Ruby	Ruby-LMP19656	80,49 €
	Lampe Original	BL-FP190A / SP.8TK01GC01	EOL €
	Lampe Original	725-10225 / 330-9847 / X9KHM	EOL €
	Kompatible Lampe	LMP-K21744	57,86 €
	Kompatible Lampe	LMP-K19655	56,67 €
	Lampe Original	Lamp-so1326	55,04 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	TSKB-IR02 white	32,09 €
	Fernbedienung Original	BR-5023L / BR-3057L / BR-5029L / BR-5030L / BR-5033L	28,86 €
	Fernbedienung Original	TSKB-IR02 black	38,08 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2013 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2013-04-25 15:12:05

Data



More Details



HCinema

<https://www.projector-database.com/pro/optomas300-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.