

Optoma ZU506T

EAN/UPC:796435 44 353 5

OPTOMA ZU506T



A brief introduction to the ZU506T: The Optoma standard portable 3D Laser BrilliantColor DLP projector offers 5000 Ansi-Lumen, a contrast of 1800:1 and a HDTV 1920 x 1080 resolution. Thanks to the laser technology, the projector has a light life of up to 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. The projector also offers a lens shift function for flexible projection adjustment without loss of quality. 718 cm image width, the projector will be able to illuminate well. Rooms with residual light can be created by the projector with a smaller image width, max. 479 cm is recommended here. Furthermore, the projector can play 1080P and 4K (compressed) as well as 3D without any problems, and thus all currently offered Blu-ray formats can be recognized by the projector. The model was built by Optoma in 2019 and is no longer current.

Brief Introduction Beta 2.5

Display Type

1 x 0,67" DMD Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

5000 2222 Lux (bei 200 cm Screen)

Contrast

1800:1 full on/off 1800:1 full on/off

Black Level

2,7778 min. Lumen 1,236 min. Lumen

Lens shift

Vert.: +57% --49%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

UHD (4K2K) 3840 x 2160 compressed

3D Compatibility

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p
Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Life

Laser
20000 h.

Operating Costs

0,00 € Laser

Focus

Manual

Zoom

Manual 1,6

Objective


F=2,5-3,26 f=20,91-32,62 mm

Throw Ratio

1,4-2,24:1

Audio

2 x 10W

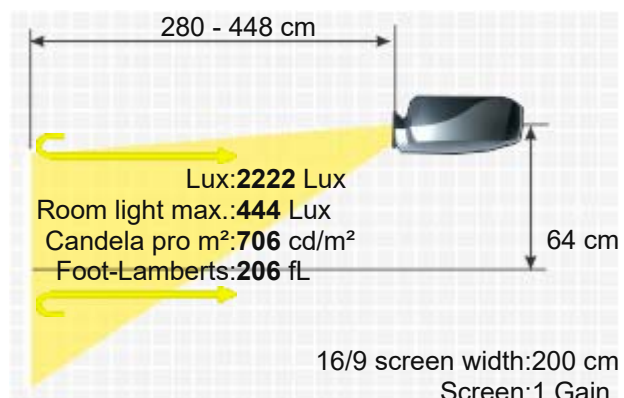

2 x HDMI in
D-sub 15pin 2x in und out
Cinch Video in
S-Video in
Mini Jack Audio in und out
Mic in
12V Trigger out
USB in
RS232C Din 9 pin in
RJ45 in
HDBaseT

Connections




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
353W / 321W in Eco Mode
373,4 x 116,8 x 302,3 mm (14,7"x4,6"x11,9") 13,07 L/dm³
36 / 30 dB in Eco Mode

Weight
Keystone
Illumination

5,50 kg / 12,13 lbs.
Vert.: +/-30°
Hori.: +/-30°
-

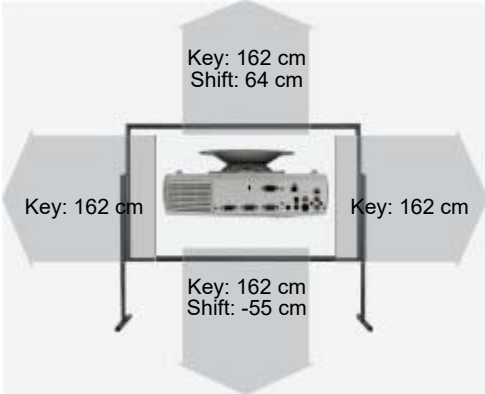

Frequenz
Foot-Lamberts

H-sync: 15,37-91,1 kHz
V-sync: 24 - 85 Hz
206 fL / max. 718 cm screen width
706 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- 360° installable
- BrilliantColor™
- PJLink™
- Lan network compatible.
- Crestron®-Software compatible.
- AMX

Please note

-B Black
-W White

Optional

Remote control original BR-3075W / 45.79P01G001A

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9002881>
2019 Discontinued (EOL) // Last update of the data: 2024-10-02
Created: 2019-02-17 15:37:53

Data



More Details



Hcinema

<https://www.projector-database.com/pro/optomazu506t-en.html>

