

Benq DX 650



BENQ DX 650



Brief Introduction

Beta 2.5

The Benq DX 650 standard portable DLP projector has 1600 Ansi lumens, a contrast of 600:1 and an XGA 1024 x 768 resolution. An image width of up to 348 cm is possible. However, the image should be smaller in room light. We recommend max. 232 cm. It is no longer offered by the manufacturer Benq.



1 x 0,7" Chip DLP
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Projector 1600
600:1 full on/off
2,6667 min. Lumen

Screen 518 Lux (bei 203 cm Screen)
600:1 full on/off
0.868 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

Video Modes

NTSC, SECAM, PAL, NTSC 4.43 HDTV 1080i, 720p, 575i

Application

Standard-Portabel | External training and company presentations, as well as product presentations.
Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

210W NSH Lamp
Articel Nr.: 60.J3416.CB1

Light Life

1500 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,12

Objective

F=2,6-3,1

Throw Ratio

1,620-1,975:1

Audio

3W Mono

Connections

RGB: Analog-D-sub 15pin x in 1 out 1
S-Video: Mini DIN 4 pin x 1
Composite Video und Audio: RCA(L/R) x 2
Component (Y Pb Pr), RCA jack x 3
Audio: Stereo Mini Jack x1 -PC
Maus Control Port: USB x 1
RS232 Control port x 1

Ceiling Mounting

Yes

Power

330W

Size WxHxD

308 x 95 x 238 mm (12,1"x3,7"x9,4") 6,96 L/dm³

Operating Noise

34dB

Weight

3,10 kg / 6,83 lbs.

Keystone


-

Illumination

85%

Frequenz

H-sync: 20-88 kHz
V-sync: 20-100 Hz

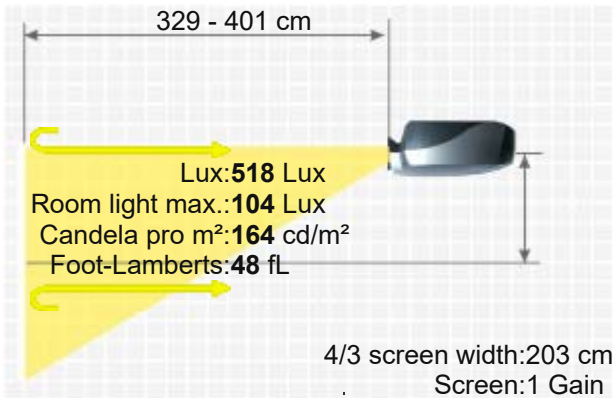

Foot-Lamberts	48 fL / max. 348 cm screen width
	164 cd/m²
Features	■ Freeze ■ Kensington Slot ■ Picture-in-Picture ■ Remote control with laser pointer und mouse control ■ water-cooled ■ water-cooled
In Test	-
Status	-
Data	- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/benqdx650-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.