

Panasonic PT AE3000E/U

PANASONIC PT AE3000E/U



Brief Introduction

Beta 2.5

The high-end home cinema PT AE3000E/U LCD has 1600 Ansi lumens, a contrast of 60000:1 and an HDTV 1920 x 1080 resolution. With the lens shift function, the projector can be positioned very freely. 1600 Ansi lumens ensure that a picture width of 406 cm is also possible. However, if room light is available, the picture should be a maximum of 271 cm wide. Furthermore, the projector can play 1080P without any problems. The operating noise of just 22 decibels makes the projection quiet. The model was built by Panasonic in 2008 and is no longer current, but is still a popular projector in our database.

Display Type

3 x 0,74" D7 LCD TFT Panel
HDTV 16/9 Liquid Crystal Display

Ansi-Lumen

1600

Contrast

60000:1 full on/off

Black Level

0,0267 min. Lumen

Lens shift

Vert.: +/-100% Hori.: +/-40%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

Application

High-End Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

165W UHM Lamp

Light Life

Article Nr.: ET-LAE1000

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 2

Objective

F=1,9-3,2 f=22,4-44,8 mm

Throw Ratio

1,37-2,73:1

Audio

Nein


Connections

3 x HDMI 1.3 in
D-sub 15pin in
2 x YUV in
S-Video in
Cinch Video in
RS232C Din 9pin in

Ceiling Mounting

Yes, is possible.

Projector
Screen
711 Lux (200 cm Screen width)
60000:1 full on/off
0,012 min. Lumen

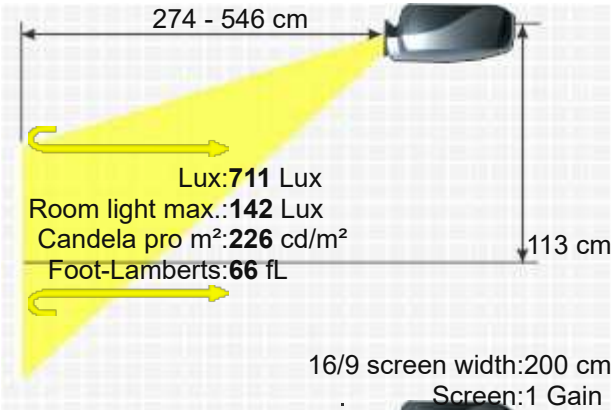

Power 240W / 0,1W standby
Size WxHxD 460 x 130 x 300 mm (18,1"x5,1"x11,8") 17,94 L/dm³
Operating Noise 22dB


Weight 7,20 kg / 15,87 lbs.
Keystone Vert.: +/-30°
Illumination -

Frequenz H-sync: 30-70 kHz
V-sync: 50-87 Hz

Foot-Lamberts 66 fL / max. 406 cm screen width
226 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Kensington Slot
- Gamma correction
- Dynamic iris
- Overscan adjustable
- De-interlacer with 3:2 pull down.

Screen Mirroring -
In Test -

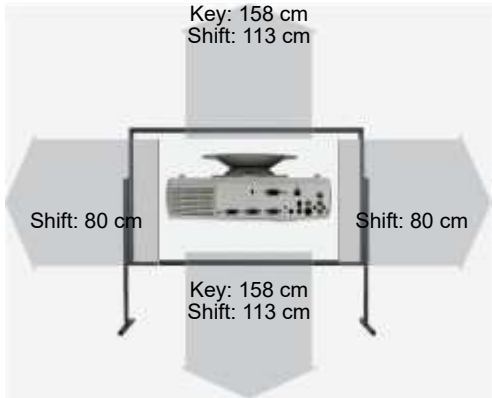

Optional accessories

	Lampe Ruby	Ruby-LMP16284	131,79 €
	Lampe inkl. Luftfilter Original	ET-LAE1000	EOL €
	Kompatible Lampe	LMP-K16284	72,40 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	N2QAYB000316	EOL €
	Luftfilter Original	TXFKN01VKF5	EOL €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2008 Discontinued (EOL) // Last update of the data: 2026-06-09



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptae3000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.