



Model Name **MW663 Digital Projector**

Unique selling point

- * Designed for Business
- * Easy carrying & Control
- * Easy Maintenance
- * Wireless display with Qpresenter App

Trade Mark




Projection System	DLP		
Native Resolution	WXGA(1280x800)		
Brightness	3000AL		
Contrast Ratio	13000:1		
Display Color	1.07 Billion Colors		
Lens	F2.59-2.87, f=16.88-21.88 mm		
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)		
Throw Ratio	1.21-1.57(76.5"@ 2m)		
Image Size (Diagonal)	44"-300"		
Zoom Ratio	1.3:1		
Lamp Type	210W		
Lamp(Normal/Economic/SmartEco Mode)*	4000/5000/6500 hours		
Keystone Adjustment	1D, Vertical +/- 40 degrees		
Projection Offset	120% ±5%		
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)		
Horizontal Frequency	31K~102KHz		
Vertical Scan Rate	23~120Hz		
Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	
	Video Compatibility	NTSC, PAL, SECAM	
Interface	Computer in (D-sub 15pin)	x 2(Share with component)	
	Monitor out (D-sub 15pin)	x 1	
	HDMI	x 1	
	Composite Video in (RCA)	x 1	
	S-Video in (Mini DIN 4pin)	x 1	
	Audio in (Mini Jack)	x 1	
	Audio L/R in (RCA)	x 1	
	Audio out (Mini Jack)	x 1	
	Speaker	2W x 1	
	USB (Type A)	x 1 (USB Reader & Wireless Display)	
	USB (Type mini B)	x 1 (Download & UBS display)	
	RS232 (DB-9pin)	x 1	
	IR Receiver	x2 (Front+Top)	
Dimensions	Dimensions(W x H x D)	312 x 104 x 244 mm	
	Weight	2.75KG	
Power	Power Supply	AC100 to 240 V, 50 to 60 Hz	
	Power Consumption	303W, Standby<0.5W	
Audible Noise	32/28 dBA (Normal/Economic mode)		
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)		
Picture Modes	Dynamic/Presentation/sRGB/Cinema/User 1/User 2		
Accessories	Standard	Optional	
	Remote Control w/ Battery	Presentation Plus	P/N: 65J9306.002
	Power Cord (by region)	Spare Lamp Kit	P/N: 5JJ8J05.001
	User Manual CD	Ceiling Mount	P/N: 5JJ2K01.001
	Quick Start Guide	3D Glasses	P/N: 5JJ0T14.011
	Warranty Card (by region)	Carry bag	
	VGA(D-sub 15pin) Cable		

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.


MW663 Digital Projector

Distance Chart

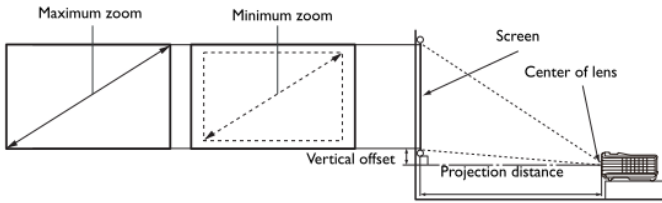

Screen size				Distance from screen (mm)			Vertical offset (mm)
Diagonal		W (mm)	H (mm)	Min length	Average	Max length	
Inch	mm			(max. zoom)		(min. zoom)	
40	1016	862	538	1046	1203	1359	54
50	1270	1077	673	1307	1503	1699	67
60	1524	1292	808	1569	1804	2039	81
80	2032	1723	1077	2092	2405	2719	108
100	2540	2154	1346	2614	3007	3399	135
120	3048	2585	1615	3137	3608	4078	162
150	3810	3231	2019	3922	4510	5098	202
200	5080	4308	2692	5229	6013	6797	269
220	5588	4739	2962	5752	6614	7477	296
250	6350	5385	3365	6536	7516	8497	337
300	7620	6462	4039	7843	9020	10196	404

Wall mount/Ceiling mount Chart

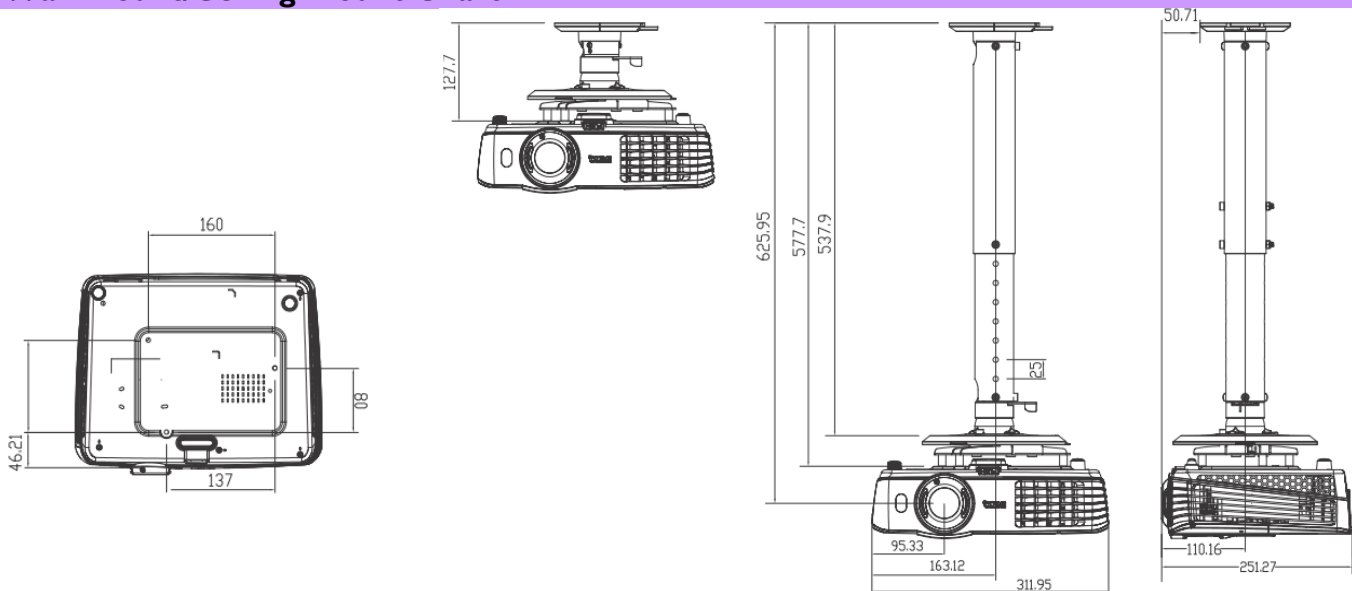

Dimension

