

Philips cBright XG2+

PHILIPS
CBRIGHT
XG2+



Brief Introduction

Beta 2.5

The cBright XG2+ LCD projector from Philips has 1500 Ansi lumens, a contrast of 300:1 and an XGA 1024 x 768 resolution. An image width of up to 337 cm is possible as the projector has 1500 Ansi lumens. However, if room light is available, the picture should be max. 225 cm wide. The model was built by Philips in 2002 and is no longer current.

Display Type

3 x 0,9" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

1500

500 Lux (bei 200 cm Screen)

Contrast

300:1 full on/off

300:1 full on/off

Black Level

5,0000 min. Lumen

1,683 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

NTSC, PAL, SECAM Pal 60 NTSC 4,43 HDTV Ready™, HDTV Videoeingang (480p/720p/1080i)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

200W UHP Lamp

Articel Nr.: LMP-K18667

Light Life

2000 h.

Operating Costs

11,9% / 0,05 €

Focus

Manual

Zoom

Manual 1,27

Objective

F=1,8-2,2 f=37-47 mm

Throw Ratio

2,02-2,57:1

Audio

-

Connections

1 x CVBS Video (Cinch)

1 x S-Video (Y/C DIN)

1 x Dateneingang (15pol D-sub)

Video 1 x Stereo Audio (3,5 mm Stereo-Klinkenbuchse)

Daten 1 x Stereo Audio (3,5 mm Stereo-Klinkenbuchse)

1 x Digital Audio (über USB)

Maus 1 x USB Typ B

Daten 1 x Monitor-Ausgang (15pol D-sub)out

Audio 1 x Stereo Audio (3,5 mm Stereo-Klinkenbuchse) out

Ceiling Mounting

Yes

Power

250W 5W standby

Size WxHxD

328 x 102 x 226 mm (12,9"x4"x8,9") 7,56 L/dm³

Operating Noise

37dB

Weight

3,60 kg / 6,61 lbs.

Keystone

-

Illumination

-

Frequenz

H-sync: 15-108 kHz


V-sync: 50-120 Hz

Range max.: 140 MHz

Foot-Lamberts

46 fL / max. 337 cm screen width

158 cd/m²

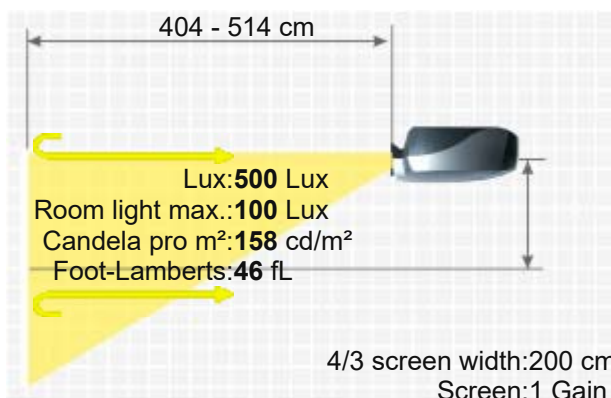

Features

- Freeze
- User logo
- Remote control with laser pointer
-

Optional

Philips bulb only	NLMP2884
Lamp ruby	Ruby-LMP2884
Lamp original	LCA3111
Compatible lamp	LMP-K18665
Universal Remote original	Fernb-uni-V3

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n18667>
2002 Discontinued (EOL) // Last update of the data: 2023-09-25

More Details



HCinema

<https://www.projector-database.com/pro/philipscbrightxg2plus-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.