

Sanyo PLC XU350

SANYO PLC XU350



Brief Introduction

Beta 2.5

With the PLC XU350, manufacturer Sanyo offers an LCD projector with XGA 1024 x 768 resolution and a contrast of 500:1. Thanks to the brightness of 3500 Ansi lumens, an image width of 515 cm is possible. The projector will also manage slightly brighter rooms with a smaller picture width (we recommend max. 343 cm). The model was built by Sanyo in 2009 and is no longer current.

Display Type



3 x 0,63" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

3500 / 2450 im Eco Mode 1167 Lux (bei 200 cm Screen)

Contrast

500:1 full on/off 500:1 full on/off

Black Level Offset

7,0000 min. Lumen 2,348 min. Lumen

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

225W UHP Lamp

Articel Nr.: LMP-131

Light Life

1500 h. 2500 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,6-1,76 f=22,3-26,8 mm

Throw Ratio

1,72-2,07:1

Audio

1W Mono

Connections

D-sub 15 pin in und out

S-Video in

Cinch Video in

RJ45 in

Mini Jack Audio in


RS232C Din 9 pin in

Ceiling Mounting

Yes

Power

287 / 225W in Eco Mode

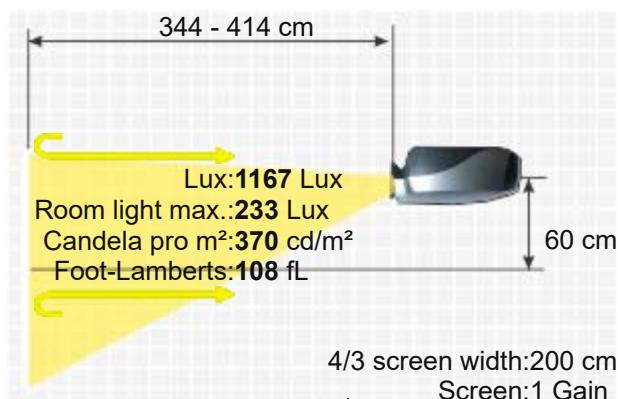

Size WxHxD 326 x 92,6 x 266,8 mm (12,8"x3,6"x10,5") 7,98 L/dm³
Operating Noise 34 / 29 dB in Eco Mode

Weight 2,60 kg / 5,73 lbs.
Keystone Vert.: +/-30°
Illumination 85%
H-sync: 15-100 kHz
Frequenz V-sync: 50-100 Hz
Range max.: 140 MHz
Foot-Lamberts 108 fL / max. 515 cm screen width
370 cd/m²

- Features
- Direkt Power Off
 - Freeze
 - Blackboard Modus
 - User logo
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 - Password protection
 - PJLink™
 - Lan network compatible.
 -

Optional	Philips bulb only	NLMP19034
	Lamp ruby	Ruby-LMP19034
	Lamp original	610-343-2069 / LMP131 / ET-SLMP131
	Compatible lamp	LMP-K19024
	Remote control original	6451010766 / MXAT / CXZR
	Ceiling Mount 100-120	Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19025>
2009 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/sanyoplcxu350-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

