

Sony VPL-DX220

SONY VPL-DX220



Brief Introduction

Beta 2.5

The Sony VPL-DX220 LCD projector has 2700 Ansi lumens, a contrast of 3000:1 and an XGA 1024 x 768 resolution. 2700 Ansi lumens ensure that a picture width of 453 cm is also possible. However, if room light is available, the picture should be max. 302 cm wide. Furthermore, the projector can play 1080P without any problems. The model was built by Sony in 2016 and is no longer current.

Display Type



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2700 / 1700 im Eco Mode 900 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off 3000:1 full on/off

Black Level

0,9000 min. Lumen 0,3 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

Articel Nr.: LMP-D214

Light Life

3000 h. 6000 h. in eco Mode

Operating Costs

14,29% / 0,06 €

Focus

Manual

Zoom

Manual 1,2

Objective

-

Throw Ratio

1,47-1,77:1

Audio

1 x 1W

Connections

HDMI in

D-sub 15pin in

Cinch Video in

Mini Jack Audio out

Ceiling Mounting

Yes

Power


-

Size WxHxD

325,1 x 79,8 x 230,5 mm (12,8"x3,1"x9,1") 5,91 L/dm³

Operating Noise

-

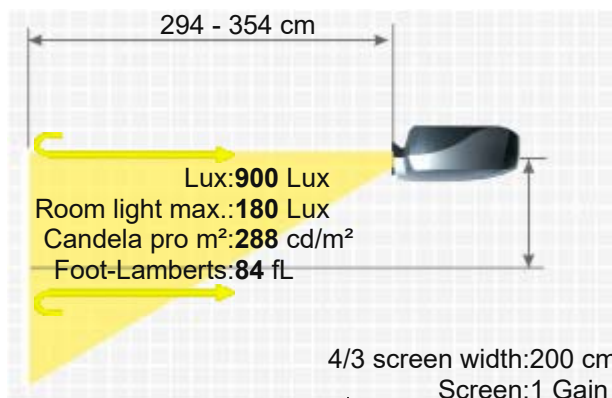

Key: 170 cm

Weight 2,70 kg / 5,95 lbs.
Keystone Vert.: +/-30°
Illumination -
Frequenz H-sync: 19-92 kHz
V-sync: 48-92 Hz
Foot-Lamberts 84 fL / max. 453 cm screen width
288 cd/m²

Features ■ Full HD 1080P compatible
■ Eco Mode

Ceiling bracket original PAM-210
Lamp original LMP-D214
Remote control original 149046311 / RM-PJ8

Optional
Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc1514>
2016 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2016-08-11 12:30:10



More Details



HCinema

<https://www.projector-database.com/pro/sonyvpldx220-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.