

Sony VPL EX230



SONY VPL EX230



Brief Introduction

Beta 2.5

The standard portable Sony VPL EX230 LCD projector has 2800 Ansi lumens, a contrast of 3300:1 and an XGA 1024 x 768 resolution. The lamp of the projector is specified with a lamp life of 10000 hours, which is over 13.7 years with a daily viewing time of 2 hours. The projector can illuminate a picture width of up to 461 cm thanks to its 2800 Ansi lumens. In room light, however, the picture width should ideally be less than 307 cm. 1080P playback is also no problem for the projector. The model was built by Sony in 2014 and is no longer current.

Display Type

 3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2800 / 1600 im Eco Mode

933 Lux (bei 200 cm Screen)

Contrast

3300:1 full on/off

3300:1 full on/off

Black Level

0,8485 min. Lumen

0,283 min. Lumen

Offset

-
XGA 1024 x 768
786.432 Pixel

Resolution

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source

210W Lamp

Article Nr.: LMP-E212

Light Life

3000 h. 10000 h. in eco Mode

Operating Costs

16,67% / 0,07 €

Focus

Manual

Zoom

Manual 1,31

Objective

-

Throw Ratio

1,47-1,77:1

Audio

Nein

Connections

HDMI in
2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
RS232C
RJ45 in
USB Typ A,B

Ceiling Mounting

Yes, is possible.

Power


261 / 210W in Eco Mode

Size WxHxD

365 x 105,3 x 252,5 mm (14,4"x4,1"x9,9") 9,66 L/dm³

Operating Noise

38 / 30 dB in Eco Mode

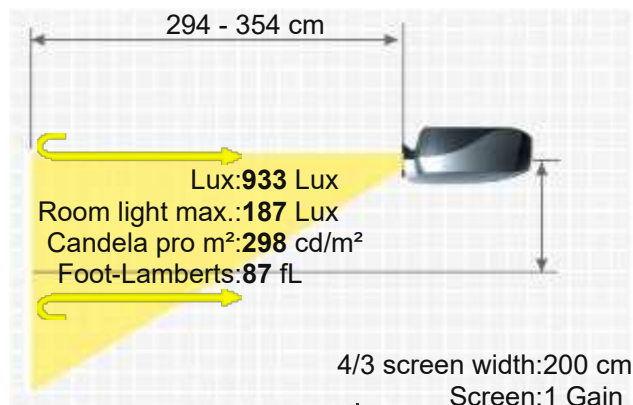

Weight

3,80 kg / 8,38 lbs.

Keystone

Vert.: +/-30°

Illumination	-
Frequenz	H-sync: 14-93 kHz V-sync: 47-93 Hz
Foot-Lamberts	87 fL / max. 461 cm screen width 298 cd/m²
Features	■ Full HD 1080P compatible
	■ Direkt Power Off
	■ Freeze
	■ Blank (Black screen button)
	■ Eco Mode
	■ Lan network compatible.
	■ Crestron®-Software compatible.
Screen Mirroring	-



Optional accessories

	Nackte Osram Lampe	NLMP20833	67,02 €
	Lampe Ruby	Ruby-LMP20833	80,87 €
	Lampe Original	LMP-E212	211,76 €
	Kompatible Lampe	LMP-K20833	54,51 €
	Fernbedienung Original	149046311 / RM-PJ8	26,48 €
	Deckenhalterung 100-120	Halterung100	47,86 €
	Luftfilter universal	uni3mm	18,15 €

Status	2014 Discontinued (EOL) // Last update of the data: 2025-03-03
Data	Created: 2015-07-09 08:56:01

More Details



HCinema

<https://www.projector-database.com/pro/sonyvplex230-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.