

Sony VPL EX235



SONY VPL EX235



With the VPL EX235, manufacturer Sony offers a standard portable LCD projector with XGA 1024 x 768 resolution and a contrast of 3300:1. The projector is equipped with a microphone jack plug and 16W speakers, so no additional speakers are required for presentations or training courses. A screen width of up to 461 cm is possible. However, the picture should be smaller in room light. We recommend max. 307 cm. Video signals 1080P are also no problem for the projector. The model was built by Sony in 2014 and is no longer current.

3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector	2800 / 1600 im Eco Mode	Screen	933 Lux (bei 200 cm Screen)
Contrast	3300:1 full on/off		3300:1 full on/off
Black Level Offset	0,8485 min. Lumen		0,283 min. Lumen

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

210W Lamp

Articel Nr.: LMP-E212

3000 h. 5000 h. in eco Mode

16,67% / 0,07 €

Manual

Manual 1,31

-

1,37-1,80:1

1 x 16W

HDMI in

2 x D-sub 15 pin in 1 x out

S-Video in

Cinch Video in



Mini Jack Audio in

RS232C

RJ45 in

USB Typ A,B

Mikrofon in

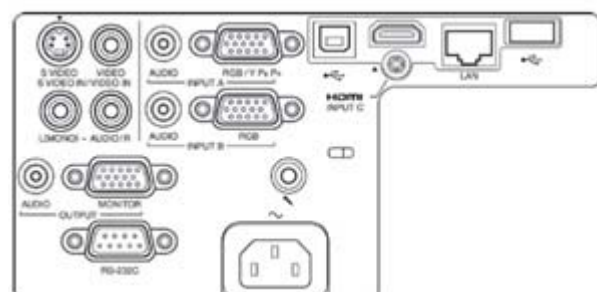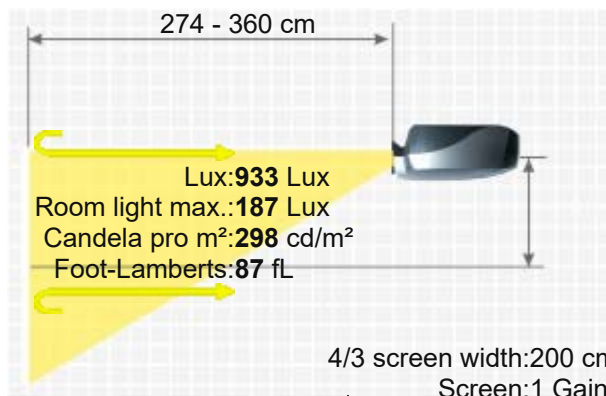

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting Yes
Power 286 / 212W in Eco Mode
Size WxHxD 365 x 105,3 x 252,5 mm (14,4"x4,1"x9,9") 9,66 L/dm³
Operating Noise 38 / 30 dB in Eco Mode

Weight 4,00 kg / 8,82 lbs.
Keystone Vert.: +/-30°
Illumination -

Frequenz H-sync: 14-93 kHz
V-sync: 47-93 Hz

Foot-Lamberts 87 fL / max. 461 cm screen width
298 cd/m²

- Features
- Full HD 1080P compatible
 - Direkt Power Off
 - Freeze
 - Blank (Black screen button)
 - Eco Mode
 - Lan network compatible.
 - Crestron®-Software compatible.
 - Digital zoom
 - Auto dimming mode

Optional

Ceiling bracket original	PAM-210
Lamp original	LMP-E212
Air filter original	442670201
Remote control original	149046311 / RM-PJ8

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc1514>
2014 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2015-01-06 13:15:10




More Details



HCinema

<https://www.projector-database.com/pro/sonyvplex235-en.html>

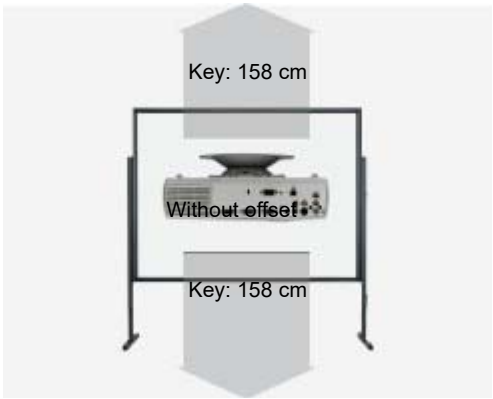

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.