

Sony VPL VW870ES

SONY VPL VW870ES



The Sony VPL VW870ES 3D SXRD projector has 2200 Ansi lumens and a UHD (4K+2K) 4096 x 2160 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 287 cm is possible, as the projector has 2200 Ansi lumens. However, if room light is available, the picture should be max. 191 cm wide. Furthermore, the projector can play 1080P and 4K as well as 3D without any problems, and therefore all currently available Blu-ray formats can be recognized by the projector. At just 24 decibels, the device is one of the quieter projectors. The model was built by Sony in 2018 and is no longer current.

3 x 0,74" SXRD Chip

UHD 19/10 Silicon X-tal Reflective Display (SXRD)

2200 1043 Lux (bei 200 cm Screen)

- -

- -

Vert.: +/-80% Hori.: +/-31% motorisch

UHD (4K+2K) 4096 x 2160

8.847.360 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray (60p)

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

High-End Homecinema | Medium screen width or rooms with little light, max. 100 lumens.

Laser Diode

Article Nr.: LMP9001897

-

0,00 € Laser

Powered

Powered 2,06

optional

optional

Nein


2 x HDMI mit HDCP2.2

RS232C Din 9pin in

RJ45 in

12V Trigger out

USB

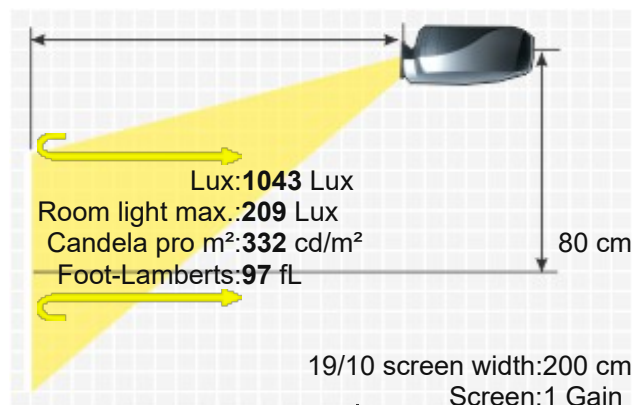



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
490W
560 x 223 x 510,5 mm (22"x8,8"x20,1") 63,69 L/dm³
24dB

Weight
Keystone
Illumination

22,00 kg / 48,5 lbs.
Vertical
-

Frequenz

H-sync: 19-72 kHz
V-sync: 48-92 Hz

Foot-Lamberts


97 fL / max. 287 cm screen width
332 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion motorisch
- Gamma correction
- Dynamic iris
- High Dynamic Range (HDR)
- Remote control with backlight
- Lan network compatible.
- Overscan adjustable

Screen Mirroring

-

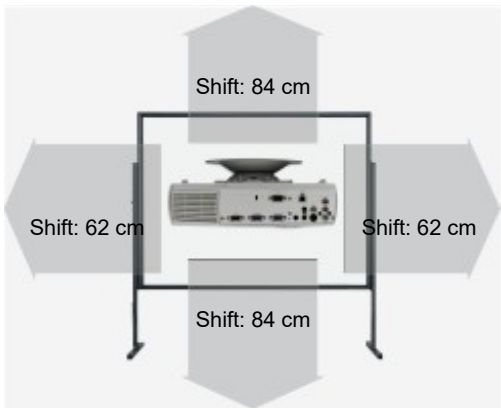

Optional accessories

Objektiv Original	VPLL-Z7013	EOL €
Objektiv Original	VPLL-Z7008	EOL €
Fernbedienung	RM-PJ22 / RM-PJ24 / RM-PJ28	32,43 €
Deckenhalterung 220	Halterung45	83,60 €



Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
VPLL-Z7013	1.27-2.73:1	2.5-5.5 m	+/-80%	+/-31%	Powered
VPLL-Z7008	0.8-1.02:1	1.6-2 m	+/-50%	+/-18%	Powered

Status

2018 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2018-09-04 11:00:48

Data

More Details



HCinema

<https://www.projector-database.com/pro/sonyvplw870es-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.