

Specktron XL 420 UST



SPECKTRON XL 420 UST



Brief Introduction

Beta 2.5

The Specktron model XL 420 UST is an LCD projector with XGA 1024 x 768 resolution and a contrast of 2000:1. The lamp life is specified by the manufacturer as 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. This projector has a projection ratio of just 0.33:1. For a 2 m wide image, the projector only needs to be 66 cm away from the screen. The model was built by Specktron in 2012 and is no longer current.

3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

2700

900 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,3500 min. Lumen

0,451 min. Lumen

Offset

-

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

Short Distance | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

215W Lamp

Light Life

4000 h. 6000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=1,8 f=4,21mm

Throw Ratio

0,33:1

Audio

1 x10W

Connections

2 x HDMI in
2 x D-sub 15 pin in 1 x out
YUV in
S-Video in
Mini Jack Audio in und out
RS232C
RJ45
USB

Ceiling Mounting

Yes

Power

280W

Size WxHxD

420 x 110 x 345 mm (16,5"x4,3"x13,6") 15,94 L/dm³

Operating Noise

-

Weight

5,50 kg / 12,13 lbs.

Keystone

Vert.: +/-5°

Illumination


75%

Frequenz


H-sync: 15-100 kHz
V-sync: 48-85 Hz

Foot-Lamberts

84 fL / max. 453 cm screen width

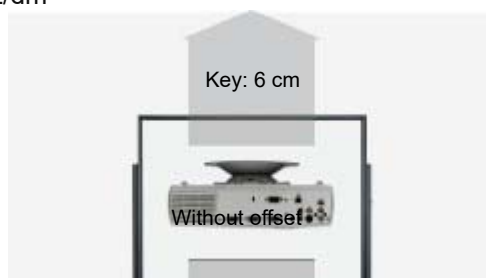

288 cd/m²



- Eco Mode
- Lan network compatible.
- Short-throw projector

Features

Status Data
2012 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/specktronxl420ust-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.