

Viewsonic PJD6351LS

VIEWSONIC PJD6351LS



The Viewsonic PJD6351LS 3D DLP projector has 3200 Ansi lumens, a contrast of 15000:1 and an XGA 1024 x 768 resolution. The lamp has a service life of up to 5000 hours, which is over 6.8 years if enjoyed for two hours a day. Horizontal and vertical keystone correction makes setting up the picture childs play. 493 cm picture width, the projector will be able to illuminate well. However, if room light is available, the picture width should ideally not exceed 329 cm. The HDMI MHL (Mobile High-Definition Link) port allows 1080p / 60 Hz image mirroring (screen mirroring) to be transmitted from the smartphone while it is being charged at the same time via the connection. The model is also Full HD 1080P and 3D compatible. The model was built by Viewsonic in 2015 and is no longer current.

Brief Introduction Beta 2.5

Display Type

1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 3200 Screen 1067 Lux (bei 200 cm Screen)

Contrast

Projector 15000:1 full on/off Screen 15000:1 full on/off

Black Level

Projector 0,2133 min. Lumen Screen 0,071 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Frame Sequential (3D Ready)

Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

190W Lamp

Articel Nr.: RLC-092

Light Life

5000 h. 6000 in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,1

Objective

-

Throw Ratio

-

Audio


1 x 2W

Connections

1 x HDMI 1.4 mit MHL in

1 x D-sub 15pin in 1 x out

USB Typ B in

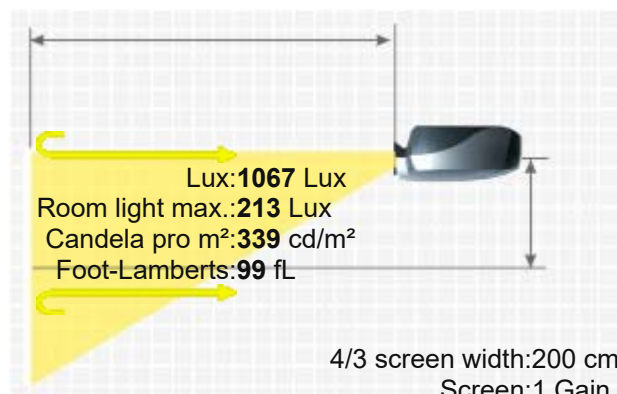

	RS232C Din 9 pin in
	RJ45 in
	Mini Jack Audio in und out
Ceiling Mounting	Yes
Power	315W
Size WxHxD	316 x 103,7 x 228 mm (12,4"x4,1"x9") 7,42 L/dm³
Operating Noise	34 / 29 dB in Eco Mode
Weight	2,20 kg / 4,85 lbs.
Keystone	Vert.: +/-30°
	Hori.: +/-30°
Illumination	-
Frequenz	H-sync: 15-102 kHz
	V-sync: 23-120 Hz
Foot-Lamberts	99 fL / max. 493 cm screen width
	339 cd/m²
Features	■ Real Full HD 3D
	■ Full HD 1080P compatible
	■ Eco Mode
	■ Lan network compatible.
Optional	Lamp original RLC-092
	Remote control original A-00010031, RC-JVS15-190
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=23034
Data	2015 Discontinued (EOL) // Last update of the data: 2023-09-20
	Created: 2015-08-18 10:11:23

More Details



HCinema

<https://www.projector-database.com/pro/viewsonicpjd6351ls-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.