

# Viewsonic PJD6552W

V I E W S O N I C P J D 6 5 5 2 W



The Viewsonic PJD6552W 3D DLP projector has 3500 Ansi lumens, a contrast of 22000:1 and a WXGA 1280 x 800 resolution. The lamp life is specified by the manufacturer as 4000 hours, which converts to over 5.5 years at 2 hours per day. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. An image width of up to 601 cm is possible as the projector has 3500 Ansi lumens. Rooms with residual light can be created by the projector with a smaller image width, max. 401 cm is recommended. A smartphone with MHL connection can be connected directly to the MHL/HDMI port and transmit a 1080p / 60 Hz image mirroring (screen mirroring) while the smartphone is being charged at the same time. The model is also Full HD 1080P and 3D compatible. The model was built by Viewsonic in 2015 and is no longer current.

## Brief Introduction Beta 2.5

## Display Type

 1 x 0,65" DLP Chip  
WXGA 16/10 Ti Digital Light Processing Chip

## Ansi-Lumen

Projector 3500 Screen 1400 Lux (bei 200 cm Screen)

## Contrast

22000:1 full on/off 22000:1 full on/off

## Black Level

Offset 0,1591 min. Lumen 0,064 min. Lumen

## Resolution

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

## Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

## 3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

## Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

## Light Source

- Artikel Nr.: RLC-095

## Light Life

4000 h. 5000 h. in eco Mode

## Operating Costs

11,9% / 0,05 €

## Focus

Manual

## Zoom

Manual 1,1

## Objective


-

## Throw Ratio

1,49-1,79:1

## Audio

1 x 16W

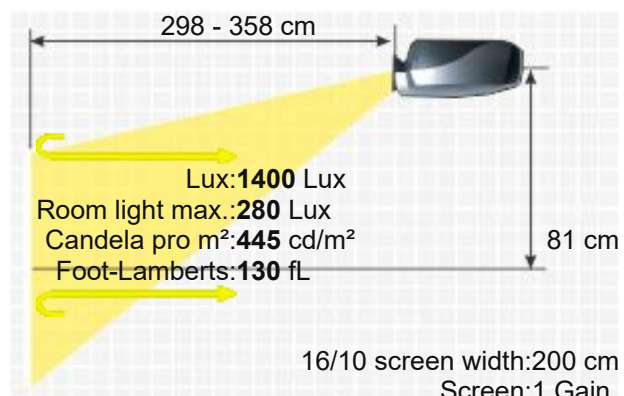

Connections 2 x HDMI 1.4a mit MHL in  
2 x D-sub 15pin in 1 x out  
Cinch Video in  
USB Typ B  
RS232C Din 9 pin in  
Mini jack Audio in und out  
RJ45 in

Ceiling Mounting Yes

Power 330W

Size WxHxD 316 x 103,7 x 228 mm (12,4"x4,1"x9") 7,42 L/dm³

Operating Noise 32 / 27 dB in Eco Mode

Weight 2,20 kg / 4,85 lbs.

Keystone Vert.: +/-30°  
Hori.: +/-30°

Illumination -


Frequenz H-sync: 15-102 kHz  
V-sync: 23-120 Hz

Foot-Lamberts 130 fL / max. 601 cm screen width  
445 cd/m²

- Features
- Real Full HD 3D
  - Full HD 1080P compatible
  - Eco Mode
  - Kensington Slot
  - Lan network compatible.

Optional Lamp original RLC-095  
Remote control original A-00010031, RC-JVS15-190

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=23273>  
2015 Discontinued (EOL) // Last update of the data: 2023-09-20  
Data Created: 2015-08-18 10:33:10

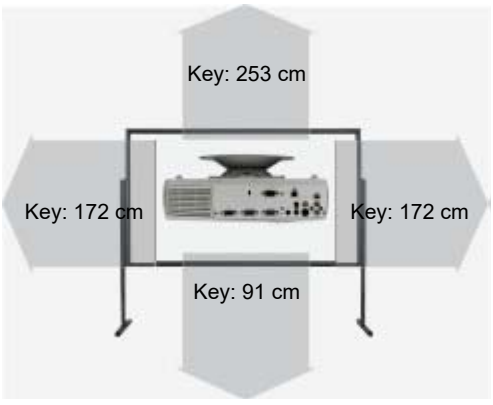

**HCinema**  
<https://www.projector-database.com/pro/viewsonicpjd6552w-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.