

Vivitek D538W 3D

VIVITEK D538W 3D



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

The standard portable D538W 3D 3D BrilliantColor DLP projector from Vivitek has 3200 Ansi lumens, a contrast of 3000:1 and a WXGA 1280 x 800 resolution. An image width of up to 575 cm is possible as the projector has 3200 Ansi lumens. However, if room light is available, the picture should be max. 383 cm wide. The projector can also display 1080P and 3D without any problems. The model was built by Vivitek in 2011 and is no longer current.



1 x 0,55" DLP Chip

WXGA 16/10 Ti Digital Light Processing Chip

Projector
3200
3000:1 full on/off
1,0667 min. Lumen

Screen
1280 Lux (200 cm Screen width)
3000:1 full on/off
0,427 min. Lumen

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready) | 2D-zu-3D Video Converter

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

240W Lamp

Article Nr.: 5811116310-S

3000 h. 4000 h. in Eco Mode

-

Manual

Manual 1,16

F=2,52-2,72 f=21,35-24,49 mm

1,52-1,76:1

2W Mono

HDMI 1.3 in

D-sub 15 pin in

S-Video in


Cinch Video in

Mini Jack Audio in

RS232C

Yes, is possible.

300 / 230W in Eco Mode

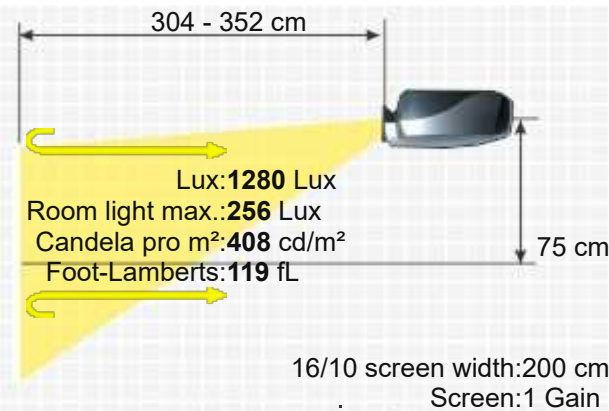

Size WxHxD	261 x 78 x 190 mm (10,3"x3,1"x7,5") 3,87 L/dm³	Key: 156 cm
Operating Noise	35 / 29 dB in Eco Mode	
Weight	1,90 kg / 4,19 lbs.	
Keystone	Vert.: +/-15°	
Illumination	85%	
Frequenz	H-sync: 15,30-90 kHz V-sync: 43-85 Hz	Key: 6 cm
Foot-Lamberts	119 fL / max. 575 cm screen width 408 cd/m²	
Features	- Real Full HD 3D - Full HD 1080P compatible - Freeze - Eco Mode - Kensington Slot - sRGB - Gamma correction - BrilliantColor™ - Overscan adjustable	
Screen Mirroring	-	

Optional accessories

	Lampe Ruby	Ruby-LMP19229	123,51 €
	Lampe Original	5811116310-S	EOL €
	Kompatible Lampe	LMP-K19228	91,09 €
	Fernbedienung Original	5041849100	28,86 €
	Deckenhalterung Länge 100-120 mm	Halterung120	47,86 €

Status2011 Discontinued (EOL) // Last update of the data: 2026-06-09





HCinema

<https://www.projector-database.com/pro/vivitek538w3d-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.