

Vivitek DW6035



VIVITEK DW6035



With the DW6035, manufacturer Vivitek offers a stationary DLP projector with WXGA 1280 x 800 resolution and a contrast of 3000:1. The integrated lens shift gives freedom when positioning the projector. 787 cm image width, the projector will be able to illuminate well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 525 cm here. The model was built by Vivitek in 2014 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



1 x 0,65" Chip DLP

WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

6000

2400 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off

3000:1 full on/off

Black Level

2,0000 min. Lumen

0,801 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-10%

Resolution

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

2 x 280W Lamp

Articel Nr.: 5811100818-S

Light Life

2000 h. 2500 h. in eco Mode

Operating Costs

10,98% / 0,36 €

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

-

Connections

DVI-D in

D-sub 15pin in

5 x BNC RGBHV in

Cinch Video in

S-Video in

USB in

RS232C Din 9 pin in

RJ45 in

12V Trigger out






Ceiling Mounting
Power
Size WxHxD
Operating Noise

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts
Features

Optional

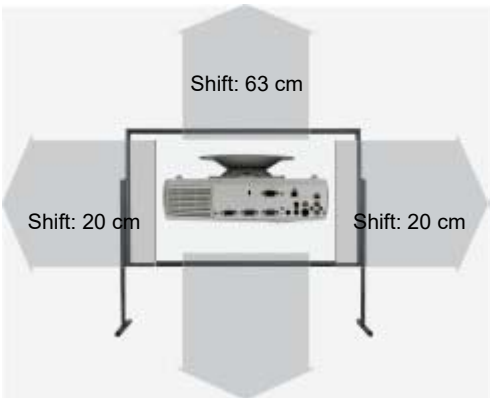

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=22975>

		Optional Lenses				
	Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses						
	3797804200-SVK / D88-UWZ01	0.78-0.99:1	1.6-2 m	50%	+/-10%	Powered
	3797745400-SVK / D88-LOZ101	3.76-5.56:1	7.5-11.1 m	50%	+/-10%	Powered
	3797745200-SVK / D88-WZ01	1.31-1.87:1	2.6-3.7 m	50%	+/-10%	Powered
	3797745000-SVK / D88-SMLZ01	2.33-3.86:1	4.7-7.7 m	50%	+/-10%	
	3797744900-SVK / D88-LOZ201	5.56-8.67:1	11.1-17.3 m	50%	+/-10%	Powered
	3797744200-SVK / D88-ST001	1.81-2.38:1	3.6-4.8 m	50%	+/-10%	Powered
Fix Optional Lenses						
	3797745100-SVK / D88-WF18501	0.8:1	1.6 m	0.0% Fix		No Zoom
Status	2014 Discontinued (EOL) // Last update of the data: 2023-08-04					
	Created: 2014-05-05 14:46:02					
Data						

More Details



<https://www.projector-database.com/pro/vivitekdw6035-en.html>

