

Wolf Cinema PRO-215 LT

WOLF CINEMA PRO-215 LT



Brief Introduction

Beta 2.5

The PRO-215 LT DLP has 4200 Ansi-Lumen, a contrast of 25000:1 and a HDTV 1920 x 1080 resolution. With the lens shift function, the projector can be positioned very freely. 658 cm image width, the projector will be able to illuminate well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 439 cm here. A smartphone with MHL connection can be connected directly to the MHL/HDMI port and transmit a 1080p / 60 Hz image mirroring (screen mirroring) while the smartphone is being charged at the same time. Playing 1080P is also no problem for the projector. The model was built by Wolf Cinema in 2016 and is no longer current.



1 x 0,65" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

Projector 4200

Screen 1867 Lux (bei 200 cm Screen)

Contrast

25000:1 full on/off

25000:1 full on/off

Black Level

0,1680 min. Lumen

0,075 min. Lumen

Lens shift

Vert.: +66% --49%

HDTV 1920 x 1080

Resolution

2.073.600 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

260W Lamp

Articel Nr.: WC-LPU215-LT

Light Life

3000 h. 7000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,6

Objective

-

Throw Ratio


1,40-2,24:1

Audio

-

Connections

2 x HDMI 1.4a mit MHL in
D-sub 15pin in und out
Mini Jack Audio in und out
Cinch Video in
USB Typ A,B in
RS232C Din 9 pin in
RJ45 in

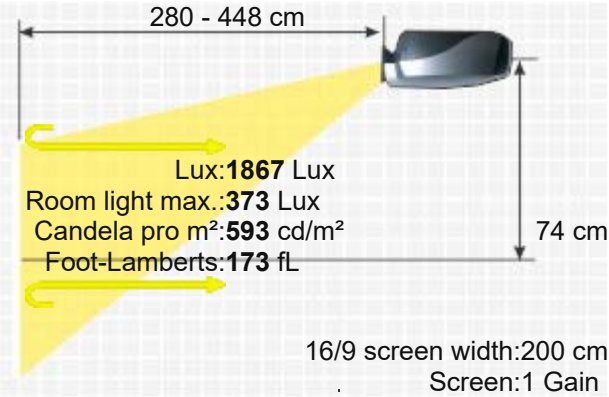

Ceiling Mounting Yes
Power 309 / 249W in Eco Mode
Size WxHxD 315 x 114 x 224 mm (12,4"x4,5"x8,8") 8,04 L/dm³
Operating Noise 28 dB in Eco Mode

Weight 2,90 kg / 6,39 lbs.
Keystone Vert.: +/-40°
Illumination -

Frequenz H-sync: 15,37-91,1 kHz
 V-sync: 24-85 Hz

Foot-Lamberts 173 fL / max. 658 cm screen width
 593 cd/m²

- Features
- Full HD 1080P compatible
 - Lens shift Funktion
 - Eco Mode
 - Lan network compatible.
 - Crestron®-Software compatible.

Optional Lenses

Status 2016 Discontinued (EOL) // Last update of the data: 2023-09-20
 Created: 2016-08-11 14:39:57



HCinema

<https://www.projector-database.com/pro/wolfcinemapro215lt-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

