

Braun Paxilux 1300 XGA



BRAUN PAXILUX 1300 XGA



Brief Introduction
Beta 2.5

A brief introduction to the Braun Paxilux 1300 XGA. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 400:1. An image width of up to 314 cm is possible as the projector has 1300 Ansi lumens. However, if room light is available, the picture should be max. 209 cm wide. It is no longer offered by the manufacturer Braun.

Display Type

3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen	1300	433 Lux (bei 200 cm Screen)
Contrast	400:1 full on/off	400:1 full on/off
Black Level Offset	3,2500 min. Lumen	1,091 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel
SXGA 1280x1024 compressed

Video Modes

SECAM, NTSC, HDTV 720p, 1080i,
Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source
150W UHE Lamp

Light Life
2000 h.

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=1,7-2,0 f=24,78mm

Throw Ratio

1,74:1

Audio

2 x 1W

Connections

DVI-I
D-sub 15pin in
YUV in
Cinch Video in
Cinch Stereo in
S-Video in
USB
Mini Jack in
RS232C

Ceiling Mounting
Yes

Power
200W


Size WxHxD
295 x 100 x 210 mm (11,6"x3,9"x8,3") 6,2 L/dm³

Operating Noise
-

Weight
3,06 kg / 6,74 lbs.

Keystone
-

Illumination
-

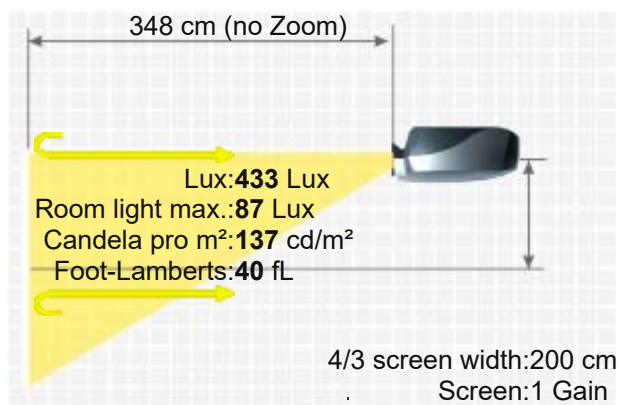

Frequenz	H-sync: 15-91 kHz V-sync: 43-85 Hz
Foot-Lamberts	40 fL / max. 314 cm screen width 137 cd/m²
Features	■ Remote control with laser pointer
Status	■ Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

<https://www.projector-database.com/pro/braunpaxilux1300xga-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.