

Canon LV 7555/F

CANON LV 7555/F



The Canon LV 7555/F LCD projector has 4600 Ansi lumens, a contrast of 900:1 and an XGA 1024 x 768 resolution. Includes a lens shift and keystone correction function, which provides freedom during installation. 4600 Ansi lumens ensure that a picture width of 591 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 394 cm. The projector is no longer sold by the manufacturer.

3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector: 4600 / 4000 im Eco Mode
900:1 full on/off
5,1111 min. Lumen
Vert.: +50% -0%
XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i,
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Wide screen width or rooms with plenty of light (over 200 lumens).
300W NSH Lamp
Articel Nr.: LV-LP17
2000 h.

Screen: 1488 Lux (bei 203 cm Screen)
900:1 full on/off
1.659 min. Lumen

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Powered


Powered 1,3

F=1,7-2,0 f=48,2-62,6 mm / F optional

1,82-2,37:1

2W + 2W, Stereo

Digitaler RGB-Eingang DVI-D (24-polig)
Analoger RGB-Eingang/
Ausgang 15poliger Mini D-Sub/SCART-Eingang, Analoger RGB-Ausgang
Analoger RGB-Eingang 5 BNC-Termina ls
Eingang Video 3 x RCA: (Komponentensignal), S-Video
Eingang Audio 2 x Mini Klinke (Stereo)
Ausgang Audio 1 x Mini Klinke (Stereo)
Eingang Audio 2 x RCA

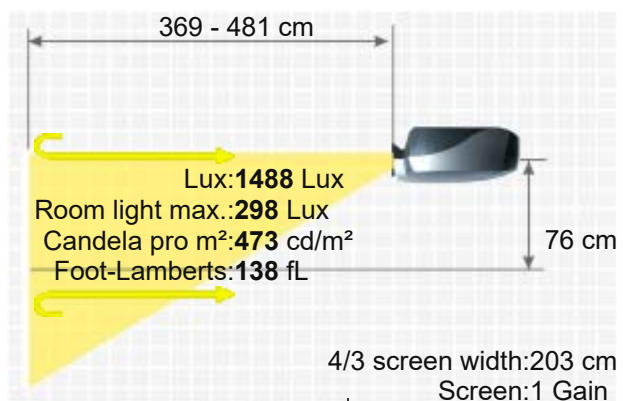

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Mausanschluss 1 x Mini DIN 8-PIN (seriell), USB Typ B
Yes
450 / 350W in Eco Mode
319 x 168 x 465,2 mm (12,6"x6,6"x18,3") 24,92 L/dm³
39 / 35 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

9,30 kg / 20,5 lbs.
Vert.: +/-40°
Hori.: +/-10°
90%
H-sync: 15-100 kHz
V-sync: 50-100 Hz
Range max.: 160 MHz
138 fL / max. 591 cm screen width
473 cd/m²

- Lens shift Funktion
- Freeze
- Eco Mode
- Gamma correction
- Remote control with laser pointer und mouse control
- Optional Wi-Fi network compatible.
- Optional LAN network compatible.
-

Features

Optional

- Bulb only NLMP790
- Lamp ruby Ruby-LMP790
- Lamp original LV-LP17 / 9015A001AA
- Compatible lamp LMP-K790
- Universal Remote original Fernb-uni-V3
- Remote control original 945 060 2239
- Air filter (big) original POA-FIL-130-g / 910 303 8774
- Air filter (small) POA-FIL-130-k / 910 303 8781

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n790>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Canon LV-IL04	4.12-5.56:1	8.4-11.3 m	50%		Powered
Canon LV-IL03	2.31-4.19:1	4.7-8.5 m	50%		Powered
Canon LV-IL02	1.26-1.81:1	2.6-3.7 m	50%		Powered
Fix Optional Lenses					
Canon LV-IL01	0.81:1	1.6 m	0.0% Fix		No Zoom

Status - Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/canonlv7555-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

