

Canon LX-4K3500Z

CANON LX-4K3500Z



Manufacturer Canon offers the LX-4K3500Z, a DLP laser projector with UHD (4K+2K) 4096 x 2160 resolution and a contrast ratio of 30000:1. The manufacturer specifies a laser lifetime of 30,000 hours, which equates to over 20.5 years of enjoyment at four hours per day. A picture width of up to 337 cm is possible; if the picture width is smaller (we recommend max. 225 cm), even rooms with residual light are no problem. The projector can also play 1080P and 4K as well as 3D, meaning that all currently available Blu-ray formats can be recognized by the projector. The model built in 2018 is no longer offered by Canon, but is still very popular in our projector database.



3 x 1,38" DLP Chip
UHD 19/10 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector

40000

30000:1

1,3333 min. Lumen

-

UHD (4K+2K) 4096 x 2160

8.847.360 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

E-Cinema | Digital Cinema (D-Cinema) in the movie theater.

Very large screen width and rooms with plenty of light and shaded daylight.

RB-Lasertechnologie

30000 h.

0,00 € Laser

Powered

Powered

optional

optional

optional

-

-

-

-

-

-

-

-

-

-

-

Screen

18963 Lux (bei 200 cm Screen)

30000:1

0,632 min. Lumen

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-


-

-

-

-

-

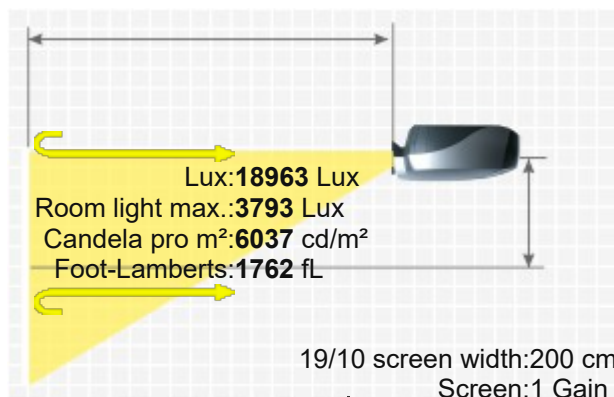

19/10 screen width: 200 cm
Screen: 1 Gain

1 x GPIO (3D) (D-sub 15 pin female); 1 x GPIO (D-sub 0 pin female); 1 x RJ45 100Base-T
2 x RJ45 (4 GPI and 6 GPO) external controls
2 x RJ45 Gigabit Ethernet
2 x RJ45 (16-channel AES3-EBU Digital Audio) out
1 x USB Type 2.0
2 x 3GSDI bidirectional (input and output)
2 x USB Type 3.0
eSATA

Ceiling Mounting	HDMI
Power	Yes, is possible.
Size WxHxD	4705W
Operating Noise	697 x 455 x 1180 mm (27,4"x17,9"x46,5") 374,22 L/dm³
	55dB

Weight	169,00 kg / 372,58 lbs.
Keystone	-
Illumination	-

Frequenz	H-sync: 15 kHz
	V-sync: 24-153 Hz

Foot-Lamberts	1762 fL / max. 337 cm screen width
	6037 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Lan network compatible.

Screen Mirroring	-
------------------	---

Optional accessories

Objektiv Original	100014017 / L2K-55ZM1	EOL €
 Objektiv Original	100014026 / L2K-10F1	EOL €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
L4K11ZM	1.24-1.73:1	2.5-3.5 m	+/-50%	+/-17%	Powered
L4K-20ZM	1.98-3.34:1	4-6.7 m	+/-50%	+/-17%	Powered
L4K-15ZM	1.52-2.1:1	3-4.2 m	+/-50%	17-%	Powered
L2K43ZM1	3.91-5.52:1	7.8-11 m	+/-27%	+/-8%	Powered
L2K-55ZM1	5-7.8:1	10-15.6 m	+/-31%	+/-10%	Powered
L2K-30ZM	2.71-3.92:1	5.4-7.8 m	+/-27%	+/-8%	Powered

Fix Optional Lenses

L2K-10F1	0.93:1	1.9 m	+/-27%	+/-8%	No Zoom
----------	--------	-------	--------	-------	---------

Status 2018 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2018-08-12 18:05:17



More Details



HCinema

<https://www.projector-database.com/pro/canonlx4k3500z-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.