


Canon LX-HD1200Z

CANON LX-HD1200Z



The LX-HD1200Z laser DLP projector from Canon has 12000 Ansi lumens, a contrast of 10000:1 and an HDTV 1920 x 1080 resolution. The service life is 20000 hours due to the laser, which is over 13.7 years if enjoyed for four hours a day. With the lens shift function, the projector can be positioned very freely. An image width of up to 1113 cm is possible as the projector has 12000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 742 cm. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Playing 1080P and 4K (compressed) is also no problem for the projector, and it even has the option of projecting HD 1080P and 4K (compressed) Blu-rays onto the ceiling using 360° projection. On the market since 2018, the model is no longer offered by the manufacturer Canon.

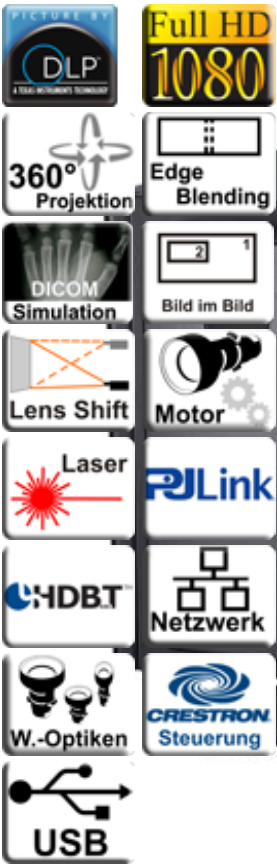

3 x 0,65" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Projector

12000

10000:1 full on/off

1,2000 min. Lumen

Vert.: +/-50% Hori.: +/-11%

HDTV 1920 x 1080

2.073.600 Pixel

HD4K 4096 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Laserlichtquelle

Article Nr.: 7N901041 / RD-465E

20000 h.

0,00 € Laser

Powered

Powered

optional

optional


Nein

Screen

5333 Lux (bei 200 cm Screen)

10000:1 full on/off


0,533 min. Lumen

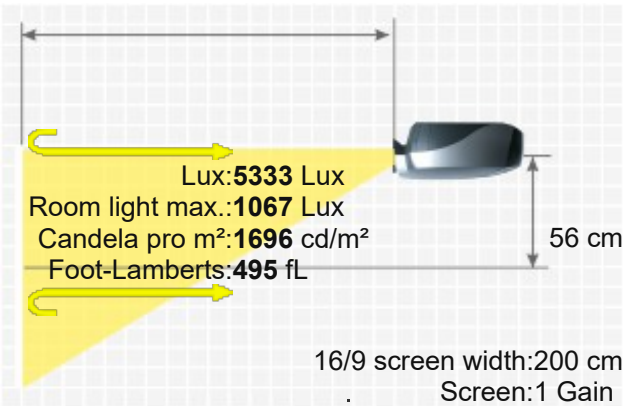

Connections	HDMI in
	D-sub 15pin in und out
	5 x BNC RGBHV in
	BNC Video in
	S-Video in
	USB Typ A 2.0 in
	RS232C Din 9 pin in
	RJ45 mit HDBaseT in
	3D Sync Ausgang: 1 x Mini-DIN 3-polig
	1 x Slot für optionale OPS-Module
Ceiling Mounting	Yes, is possible.
Power	1392 / 752W in Eco Mode
Size WxHxD	680 x 333 x 860 mm (26,8"x13,1"x33,9") 194,74 L/dm³
Operating Noise	47 / 43 dB in Eco Mode

Weight	68,00 kg / 149,91 lbs.
Keystone	Vert.: +/-40°
Illumination	Hori.: +/-40°
	-
Frequenz	H-sync: 15-153 kHz
	V-sync: 24-120 Hz
Foot-Lamberts	495 fL / max. 1113 cm screen width
	1696 cd/m²

- Full HD 1080P compatible
 - Direkt Power Off
 - Lens shift Funktion
 - Freeze
 - User logo
 - Eco Mode
 - 360° installable
 - Edge Blending
 - Picture-in-Picture
 - Password protection
 - PJLink™
 - Lan network compatible.
 - Crestron®-Software compatible.
 -
- Screen Mirroring
-

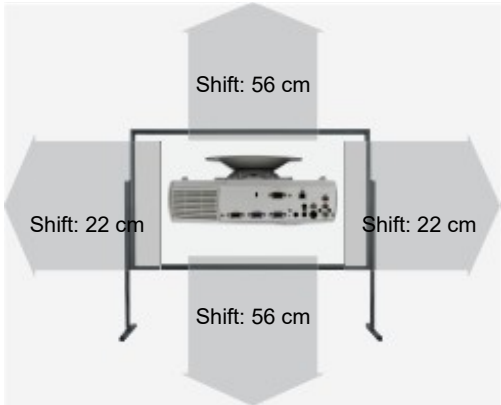

Screen Mirroring

-

Optional accessories

	Fernbedienung Original	7N901041 / RD-465E	101,45 €
--	------------------------	--------------------	----------

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
NP-9LS40ZM1	4.31-6.77:1	8.6-13.5 m	+/-55%	+/-11%	Powered
NP-9LS20ZM1	2.25-4.18:1	4.5-8.4 m	+/-50%	+/-11%	Powered
NP-9LS16ZM1	1.71-2.87:1	3.4-5.7 m	+/-50%	+/-11%	Powered
NP-9LS13ZM1	1.41-2.23:1	2.8-4.5 m	+/-50%	+/-11%	Powered
NP-9LS12ZM1	1.27-1.82:1	2.5-3.6 m	+/-50%	+/-11%	Powered
NP-9LS08ZM1	0.9-1.35:1	1.8-2.7 m	+/-50%	+/-11%	Powered

Status 2018 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2018-08-12 18:21:13



More Details



HCinema

<https://www.projector-database.com/pro/canonlxhd1200z-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.