

ChiStar CX 666



Brief Introduction

Beta 2.5

Display Type



3 x LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

3200

1067 Lux (bei 200 cm Screen)

Contrast

500:1 full on/off

500:1 full on/off

Black Level

6,4000 min. Lumen

2,147 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

165W Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual

Objective

-

Throw Ratio

-

Audio

-

Connections

D-sub 15pin in

YUV in

Cinch Video in

S-Video in

Mini Jack

RS232C

Ceiling Mounting

Yes

Power

210W

Size WxHxD

297 x 93 x 233 mm (11,7"x3,7"x9,2") 6,44 L/dm³

Operating Noise

35dB

Weight

2,90 kg / 6,39 lbs.

Keystone

Vertical

Illumination

95%

Frequenz

Range max.: 135 MHz


Foot-Lamberts

99 fL / max. 493 cm screen width

339 cd/m²

Features

-

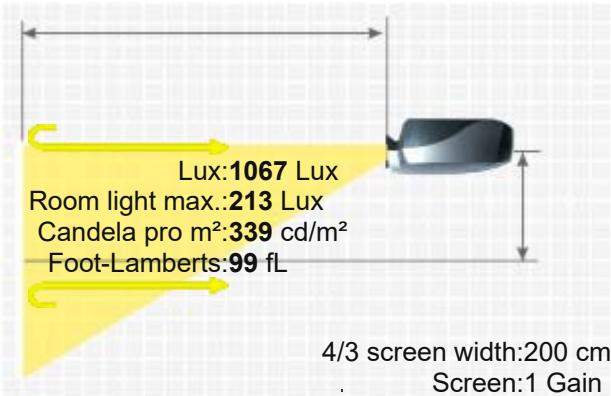

More Details



HCinema

<https://www.projector-database.com/pro/chistarcx666-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.