

ChiStar CX 66P



Brief Introduction

Beta 2.5

Display Type



3 x LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2600

867 Lux (bei 200 cm Screen)

Contrast

500:1 full on/off

500:1 full on/off

Black Level

5,2000 min. Lumen

1,744 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

-

Light Life

3000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual

Objective

-

Throw Ratio

-

Audio

-

Connections

D-sub 15pin in
YUV in
Cinch Video in
S-Video in
Mini Jack
RS232C

Ceiling Mounting

Yes

Power

210W

Size WxHxD

297 x 93 x 233 mm (11,7"x3,7"x9,2") 6,44 L/dm³

Operating Noise

35dB

Weight

2,90 kg / 6,39 lbs.

Keystone

Vertical

Illumination

95%

Frequenz


Range max.: 135 MHz

Foot-Lamberts

81 fL / max. 444 cm screen width
278 cd/m²

Features

-

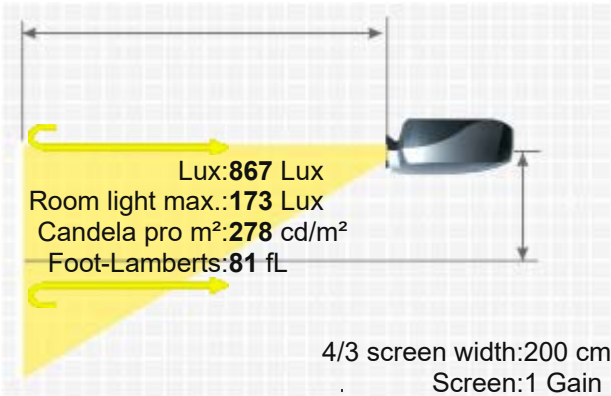

More Details



HCinema

<https://www.projector-database.com/pro/chistarcx66p-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.