

Christie Matrix SIM WQ

CHRISTIE MATRIX SIM WQ



Display Type



1 x DC3 DLP Chip
WQXGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

800

267 Lux (bei 200 cm Screen)

Contrast

100000:1 full on/off

100000:1 full on/off

Black Level

0,0080 min. Lumen

0,003 min. Lumen

Lens shift

Vert.: +/-75% Hori.: +/-37,5%

Resolution

WQXGA 2560 x 1600

4.096.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Rear Projection | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

-

Light Life

-

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

No

Connections

1 x DVI-D

2 x RS232C

1 x RS422

On-board Ethernet control capabilities

Additional Ethernet connections for Christie ArrayLOC™ network

Ceiling Mounting

-

Power


400W

Size WxHxD

400 x 400 x 406 mm (15,7"x15,7"x16") 64,96 L/dm³

Operating Noise

-

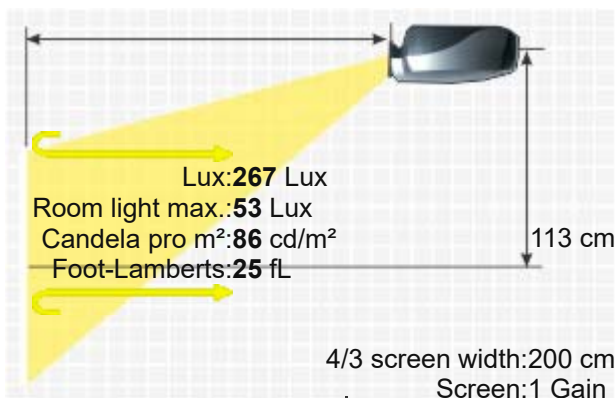

Weight

40,00 kg / 88,18 lbs.


Keystone

-

Illumination

95%

Frequenz
 H-sync: 15-120 kHz
 V-sync: 23-120 Hz
 Range max.: 300 MHz
 Foot-Lamberts
 25 fL / max. 246 cm screen width
 86 cd/m²
 Features
 ■ Lens shift Funktion

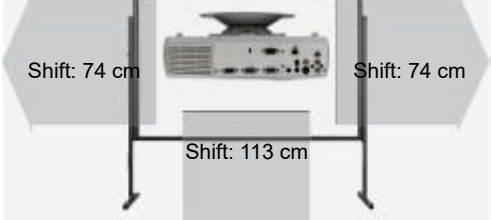

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
1.28-1.71:1	1.28-1.71:1	2.6-3.4 m	+/-50%	+/-37.5%	Manual
Fix Optional Lenses					
0.80:1	0.8:1	1.6 m	+/-50%	+/-37.5%	No Zoom
0.68:1	0.68:1	1.4 m	+/-5%	+/-5%	No Zoom

Status
 2013 Discontinued (EOL) // Last update of the data: 2023-08-04
 Created: 2013-11-29 13:38:28

Data

More Details



HCinema

<https://www.projector-database.com/pro/christiematrixsimwq-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.