

Compaq MP 1600



COMPAQ MP 1600



Brief Introduction

Beta 2.5

The standard portable MP 1600 DLP has 600 Ansi lumens, a contrast of 400:1 and a resolution. 600 Ansi lumens ensure that a picture width of 213 cm is also possible. However, if room light is available, the picture should be max. 142 cm wide. This model is no longer offered by Compaq.



1 Chip DLP
4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

600

400:1 full on/off

1,5000 min. Lumen

-

-

NTSC, PAL, SECAM, NTSC 4.43

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

- Lamp

Articel Nr.: L1550a

2000 h.

-

Manual

Manual

-

-

8W

-

Yes

-

62 x 209 x 228,4 mm (2,4"x8,2"x9") 2,95 L/dm³

40dB

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

In Test

1,90 kg / 4,19 lbs.

-

90%


-

18 fL / max. 213 cm screen width

62 cd/m²

■ Picture-in-Picture

-

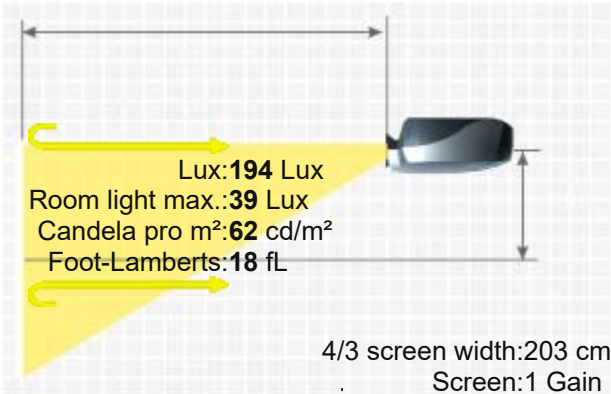

Optional	Osram bulb only	NLMP994
	Osram bulb only	NLMP994
	Lamp ruby	Ruby-LMP994
	Lamp ruby	Ruby-LMP994
	Lamp original	L1550A
	Lamp original	L1550A
	Compatible lamp	LMP-K15606
	Compatible lamp	LMP-K15606
	Universal Remote original	Fernb-uni-V3

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n994>
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/compaqmp1600-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.