

CooLux X6



COOLUX X6



The Micro-Portabel X6 3D DLP has 1000 Ansi lumens, a contrast of 10000:1 and a WXGA 1280 x 800 resolution. Thanks to the brightness of 1000 Ansi lumens, a picture width of 321 cm is possible. In room light, the picture should be max. 214 cm wide. It is also Full HD 1080P and 3D compatible.

Brief Introduction

Beta 2.5

Display Type

1 x 0,45" DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

1000 / 690 im Eco Mode

400 Lux (bei 200 cm Screen)

Contrast

10000:1 full on/off

10000:1 full on/off

Black Level

0,1000 min. Lumen

0,04 min. Lumen

Offset

Resolution

WXGA 1280 x 800
1.024.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Application

Micro-Portabel | Small mobile presentations..

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

Osram RGB-LED

Light Life

-

Operating Costs

0,00 € LED

Focus

Manual

Zoom

No Zoom

Objective

-

Throw Ratio

1,19:1

Audio

1 x 1W

Connections

HDMI 1.4 in
D-sub 15pin in per Adapter in
Mini Jack Audio in und out
USB Typ A in
Mico SD Slot in

Ceiling Mounting

-

Power

26W

Size WxHxD

180 x 28 x 110 mm (7,1"x1,1"x4,3") 0,55 L/dm³

Operating Noise

-

Weight

0,550 kg / 1,21 lbs.

Keystone

Vert.: +/-40°

Illumination



90%

Frequenz

-

Foot-Lamberts

37 fL / max. 321 cm screen width
127 cd/m²

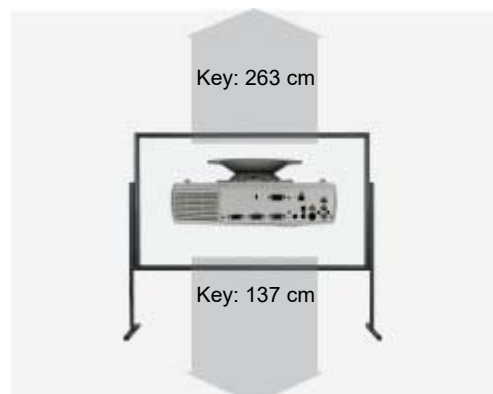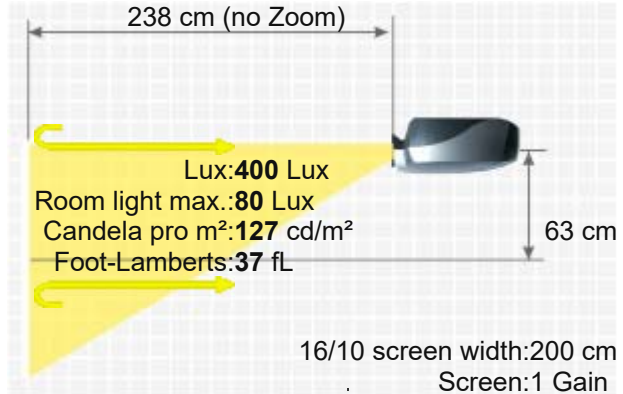

■ Real Full HD 3D

■ Full HD 1080P compatible

■ Eco Mode

■ Mico SD Slot in

2015 Current model // Last update of the data: 2023-08-04

Created: 2015-02-10 16:01:51



HCinema

<https://www.projector-database.com/pro/cooluxx6-en.html>

Features

Status

Data

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.