

Dell 1430X



DELL 1430X



Brief Introduction

Beta 2.5

Display Type



1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3200

1067 Lux (bei 200 cm Screen)

Contrast

2400:1 full on/off

2400:1 full on/off

Black Level

1,3333 min. Lumen

0,445 min. Lumen

Offset

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

240W Lamp

Articel Nr.: 725-10327

Light Life

3000 h. 5000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,54-2,73 f=18,18-21,84 mm

Throw Ratio

1,64-1,97:1

Audio

2W Mono

2 x D-sub 15 pin in 1 x out

S-Video in

Cinch Video in

USB in

Connections

Mini Jacl Audio in



Ceiling Mounting

Yes

Power

368W

Size WxHxD

290 x 90,82 x 238 mm (11,4"x3,6"x9,4") 6,21 L/dm³

Operating Noise

36 / 32 dB in Eco Mode

Weight


2,60 kg / 5,73 lbs.

Keystone

-

Illumination

85%

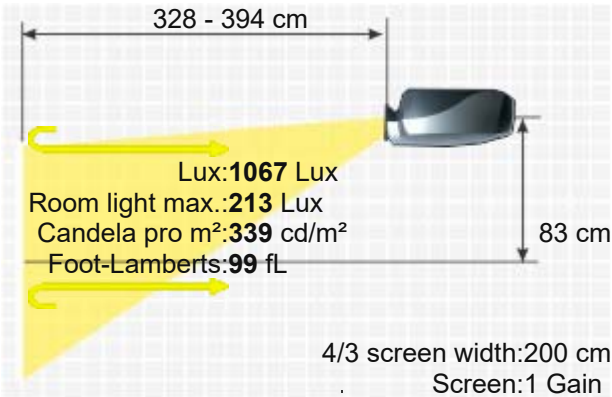

Frequenz

-

Foot-Lamberts

99 fL / max. 493 cm screen width

339 cd/m²

Features

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- sRGB
- BrilliantColor™

Optional

Remote control original KR9CC, 331-6241
Lamp original 725-10327 / 331-6240 / 469-2141 / RX2RW

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro21132>
2012 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/dell1430x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.