

Dell 2100MP

DELL 2100MP



Brief Introduction

Beta 2.5

Display Type



1 x DLP DDR Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

1000

324 Lux (bei 203 cm Screen)

Contrast

1800:1 full on/off

1800:1 full on/off

Black Level

Offset

0,5556 min. Lumen

0.18 min. Lumen

Resolution

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

Video Modes

NTSC, NTSC 4.43, PAL (B,D,G,H,I,M,N), SECAM (B,D,G,K,K,L) and HDTV (480i/P; 576i/P, 720P; 1080i)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

150W P-VIP Lamp

Articel Nr.: 730-11487 / K0392 /

310-3836

Light Life

1000 h.

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=2,4 f=22,4mm

Throw Ratio

-

Audio

-

Connections

1 x 15-pin D-sub für Analog RGB/Component Video/HDTV signal, 1 x Composite Video (RCA), 1 x S-Video, 1 x USB für Mouse Input, 1 x AC Power Input

Ceiling Mounting

Yes

Power


190W

Size WxHxD

266 x 85 x 216 mm (10,5"x3,3"x8,5") 4,88 L/dm³

Operating Noise

32dB

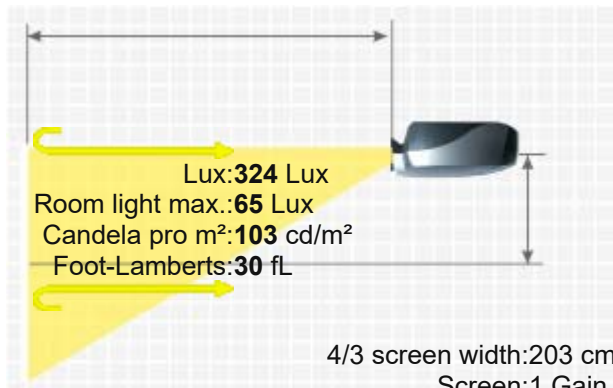

Weight	1,80 kg / 3,97 lbs.	
Keystone	Vert.: +/-30°	
Illumination	-	
Frequenz	H-sync: 15-70 kHz V-sync: 43-85 Hz	
Foot-Lamberts	30 fL / max. 275 cm screen width 103 cd/m²	
Features	■ 32x digital zoom	
In Test	-	
Optional	Bulb only Osram	NLMP1062
	Lamp ruby	Ruby-LMP1062
	Lamp original	730-11487 / K0392 / 310-3836
	Compatible lamp	LMP-K1062
	Universal Remote original	Fernb-uni-V3
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=n1062 - Discontinued (EOL) // Last update of the data: 2023-08-04	

Data



More Details



HCinema

<https://www.projector-database.com/pro/dell2100mp-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.