

Delta DP 6610



DELTA DP 6610



Brief Introduction

Beta 2.5

Display Type



1 x 0,62" LVDS DDP2230 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen
Contrast
Black Level
Offset

1900 / 1500 im Eco Mode
1800:1 full on/off
1,0556 min. Lumen
844 Lux (bei 200 cm Screen)
1800:1 full on/off
0,469 min. Lumen

Resolution

HDTV 1280 x 720
921.600 Pixel
UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Micro-Portabel | Small mobile presentations..
Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

200 / 160W im Eco Mode Lamp

Light Life

-

Operating Costs

-

Focus

Manual

Zoom

Manual 1,15

Objective

-

Throw Ratio

1,5-1,8:1

Audio

1W Mono

Connections

HDMI in
D-sub 15pin in
S-Video in
Cinch Video in
USB Typ B

Ceiling Mounting

Yes

Power

250 / 210W in Eco Mode

Size WxHxD

220 x 71 x 178 mm (8,7"x2,8"x7") 2,78 L/dm³

Operating Noise

40 / 37 dB in Eco Mode

Weight

1,45 kg / 3,2 lbs.

Keystone

Vert.: +/-15°

Illumination

80%

Frequenz

H-sync: 15-91,4 kHz
V-sync: 43-87 Hz

Foot-Lamberts


78 fL / max. 443 cm screen width
267 cd/m²

Features

■ Eco Mode

Status

2007 Discontinued (EOL) // Last update of the data: 2023-08-04

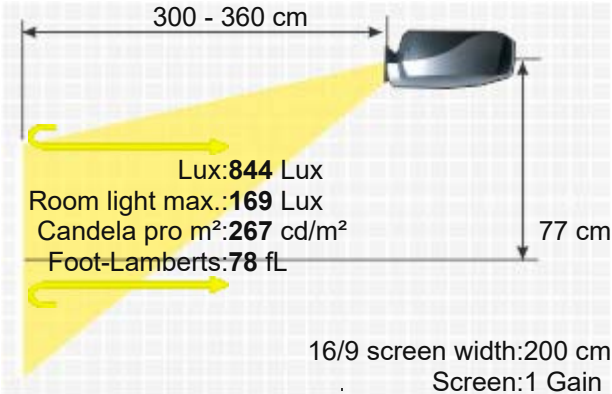

More Details



HCinema

<https://www.projector-database.com/pro/deltadp6610-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.