

TITAN WUXGA Pro Series II

TITAN WUXGA 700 • TITAN WUXGA 700 *Ultra Contrast*



PERFORMANCE SPECIFICATIONS

Brightness (±10%)

WUXGA-700: 12,000 ANSI Lumens
WUXGA-700 UC: 6,000 ANSI Lumens

Contrast Ratio (±10%)

WUXGA-700: 2000:1
WUXGA-700 UC: 5000:1

Display Type

3 x .95" Darkchip 1080p DMD™ with Fast Transit Pixels for smooth greyscale and improved contrast

DMD Specification

1920 x 1200 pixels native, 12° tilt angle

Fill Factor

87%

Sealed Optics at DMD™ Interface

Protects DMD's™ from optical contamination

Source Compatibility

- Composite, s-video, and color difference video standards
- RGB graphics standards up to 1920 x 1200
- DVI standards with HDCP compliance
- High definition RGB and color difference standards
- High definition / standard definition serial digital formats (SD/HD-SDI)

Video Processing

- Enhanced 7 point color correction
- Xenon Color Mode - User selectable yellow notch filter and xenon-color mode processing, enable the projector to closely replicate xenon lamp spectral performance.
- Class leading Video de-interlacing/processing of SD and HD sources using auto 3:2 and 2:2 extraction, ruggedized for editing discontinuities
- Pixel-based motion adaptive interpolation
- User selectable preset, parametric de-gamma and user downloadable de-gamma
- Frame Delay: as low as 1 frame, source dependant
- Auto mode selection - plug and play setup

Network Connection

LAN via RJ 45, Wireless 802.11b, full protocol feature set

Lamp Type

Dual HID modules (2 x 350W)

Lamp Life (typical)*

2000 hours / 4000 hours

Lens Mount

Zoom: Motorized horizontal and vertical lens shift, zoom and focus,
Fixed: Manual Focus.

Lens Shift (maximum)

Fixed 1.12 and Zoom Lenses:

Vert: +0.7, -0.5 frame

Hor: ±0.1875 frame

0.67 Fixed lens:

Vert: ±0.1 frame; Hor: ±0.1 frame

Lens Options

- 0.67 :1 fixed
- 1.12 :1 fixed (1.2-2.0m throw)
- 1.12 :1 fixed (3-15m throw)
- 1.39-1.87 :1 zoom
- 1.87-2.56 :1 zoom
- 2.56-4.16 :1 zoom
- 4.16-6.96 :1 zoom
- 1.12:1 Lenses include manual aperture
- High-contrast lenses available for 0.67:1 and all zoom lenses

Mechanical Mounting

- Front or rear table; Front or rear ceiling (ceiling mount optional)
- Rugged, staging tolerant chassis with integrated handles
- Optional rigging /stacking frame with integrated pitch, roll and yaw adjustments

Weight (chassis only)

68 lbs (31kg)

Overview

Digital Projection International (DPI), Texas Instruments' first DLP™ partner and the original innovator of the 3-chip DLP™ projector, proudly introduces new 3-chip 1920 x 1200 resolution displays. The TITAN WUXGA and WUXGA *Ultra Contrast* Pro Series II displays offer additional image height for a variety of applications.

Producing a massive 12,000 lumens from a lean 68 lbs. chassis, the dual lamp WUXGA-700 and WUXGA-700 *Ultra Contrast* displays employ the latest in Texas Instruments' 1080p dark chip, 3-chip DLP™ technology. Compact, robustly built and ultra-quiet for their performance class, TITANs are unmatched solutions for staging, command and control, visualization, business, and educational venues. For staging, the TITAN can be ordered with DP's RapidRig™ flying and stacking frame, which provides integrated pitch, roll and yaw adjustments, simplifying installation and alignment accuracy.

Other key benefits of the TITAN WUXGA line include:


- DP's *NextGen* electronics, featuring class leading de-interlacing with SD and HD sources processed using auto 3:2 and 2:2 extraction
- Minimal video delay from input to screen - as low as 1 frame, depending on source
- Sealed optics to protect DMD's and other focal plane components from airborne contaminants
- Seven user-selectable inputs, including HDCP compliant DVI plus SD/HD-SDI
- ColorMax calibration capabilities including enhanced seven-point color correction for broader color space and accurate color alignment
- User selectable Xenon-color mode processing, which enables the projector to closely replicate the spectral performance of a Xenon lamp
- Dual high intensity discharge lamps, which can be run individually or simultaneously, with a typical life of up to 2000 hours per lamp
- A range of precision optics with extended lens shift, compatible with all TITAN and LIGHTNING sx+ and 1080p models
- DP's CoolTek engineering, which delivers the highest lumen performance with the lowest thermal (BTU) and noise level (dB) output

The TITAN WUXGA-700 and TITAN WUXGA-700 *Ultra Contrast* Pro Series II displays are priced and sized for every venue and everyday use - bringing the precision of Digital Projection to your venue.

INPUT CAPABILITIES

Type	Connector	Quantity
Composite	BNC	1
S-Video	4-pin mini DIN	1
Component Interlaced/Std def Y, Cr/Pr, Cb/Pb, S	BNCx4	1
Graphics Progressive RGB/Progressive Interlaced Hi def Y, Cr/Pr, Cb/PB	BNCx5	1
RGBHV (Progressive)	D sub (15-pin)	1
Digital RGB	DVI	1
Serial Digital SD/HD-SDI (SMPTE 259M/292M)	BNC	1

TITAN Pro Series II

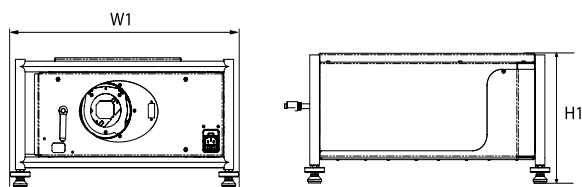

Projector Dimensions

700 Series & Ultra Contrast

Projector dimensions (in)

L1 25.4 W1 21.4 H1 10

Projector dimensions (mm)

L1 645.4 W1 543.5 H1 253.5

DIGITAL PROJECTION



TITAN WUXGA-700 side panel



shown with optional rigging frame

ADVANCED TECHNICAL SPECIFICATIONS

PARAMETERS



Native Color Temperature

6500°K ±1000°K; white balance-adjustment: 3000°K to 10000°K
User selectable Xenon-like colorimetry using dynamic optical and electronic enhancement.

HDTV Formats Supported

1080i (50Hz, 60Hz), 1080p (24Hz, 25Hz, 30Hz, 50Hz, 60Hz), 1080 24sf, 720p (50, 60Hz), 480i, 480p

Scan Rates Supported

Horizontal: 15kHz to 100kHz / Vertical: 24Hz to 85Hz

Remote Control

Addressable IR remote control, wireless and wired with loop-through / On board invertable keypad

Automation Control

LAN connection via RJ45 / RS232 9-pin D type

Operating/Storage Temperature

Operating: 0 to 40°C / Storage: -10 to 50°C

Operating Humidity

20 to 80% non-condensing

Thermal Dissipation

2,900 BTU/hr

Fan Noise

Less than 45dBA

Power Requirements

100-240 VAC ±10%, 50/60Hz single phase

Power Consumption

950 watts maximum

Projectors

TITAN WUXGA-700

TITAN WUXGA-700 Ultra Contrast

Part

109-660

109-661

Accessories

350 Watt Lamp & Housing* (2 required)

RapidRig™ Frame

TITAN 700/UC Series Adjustable Ceiling Mount

Infrared Remote (Replacement)

* Includes high-performance replacement air filter(s)

Part

108-772

107-956

108-499

105-023

Lenses

0.67:1

1.12:1

1.12:1 (short)

1.16 - 1.49:1

1.39 - 1.87:1

1.87 - 2.56:1

2.56 - 4.16:1

4.16 - 6.96:1

6.92 - 10.36:1

HB Part

105-607

105-608

105-609

109-236

105-610

105-611

105-612

105-613

109-235

1 Based on 4-6 hour/day operational profile. Venue and application conditions may impact actual lamp life.
See Digital Projection's Product Warranty Statement for details on lamp warranty.
Installations requiring horizontal or vertical tilt orientations greater than 15 degrees may reduce the actual operational hours of one of the two lamps.

ColorMAX
DIGITAL PROJECTION



DIGITAL PROJECTION, INC. • 55 CHASTAIN ROAD, SUITE 115 KENNESAW, GA. 30144 • T: 770.420.1350 • F: 770.420.1360 • www.digitalprojection.com

DIGITAL PROJECTION, LTD. • GREENSIDE WAY, MIDDLETON MANCHESTER, UK. M24 1XX • T: +44.161.947.3300 • F: +44.161.684.7674 • www.digitalprojection.co.uk

DIGITAL PROJECTION, CHINA • TOWER C, RM C1202, CAI FU JIA YUAN, NO. 19 XIAO YING STREET, CHAOYANG DISTRICT BEIJING, PR CHINA 100101 • T: +86.10.58239771 • F: +86 10 58239770

DIGITAL PROJECTION, ASIA • 16 NEW INDUSTRIAL ROAD, #02-10 HUDSON TECHNOCENTRE SINGAPORE 536204 • T: +65.6284.1138 • F: +65.6284.1238