

Digitel DGT 1688

DIGITEL DGT 1688



Brief Introduction

Beta 2.5

A brief introduction to the Digitel DGT 1688. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 400:1. The horizontal and vertical keystone correction allows the projector to be positioned very freely. 1600 Ansi lumens ensure that a picture width of 348 cm is also possible. However, if room light is available, the picture should be max. 232 cm wide. The projector is no longer sold by the manufacturer.

Display Type

3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

1600

533 Lux (bei 200 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

4,0000 min. Lumen

1,343 min. Lumen

Offset

-

Resolution

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

Video Modes

PAL, PAL-M, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,
Standard-Portabel | External training and company presentations, as well as product

Application

presentations.
Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

UHP Lamp

Light Life

-

Operating Costs

-

Focus

-

Zoom

-

Objective

-

Throw Ratio

-

Audio

-

Connections

D-sub 15pin in
Cinch Video in
S-Video in
Mini Jack
USB
RS232C

Ceiling Mounting

Yes

Power


350 / 260W in Eco Mode

Size WxHxD

287 x 99,8 x 215 mm (11,3"x3,9"x8,5") 6,11 L/dm³

Operating Noise

37 / 32 dB in Eco Mode

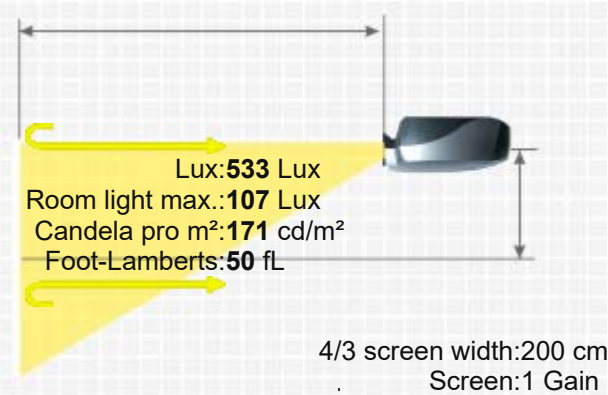

Weight	2,60 kg / 5,73 lbs.
Keystone	Vert.: +/-15° Hori.: +/-10°
Illumination	80%
Frequenz	-
Foot-Lamberts	50 fL / max. 348 cm screen width 171 cd/m²
Features	■ Eco Mode
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/digiteldgt1688-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.