

DOW UC300



DOW UC300

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

A brief introduction to the UC300: The DOW standard portable LCD projector offers 1500 Ansi lumens, a contrast of 200:1 and a WVGA 800 x 480 resolution. The projector can illuminate an image width of up to 393 cm with its 1500 Ansi lumens. In room light, however, the image width should ideally be less than 262 cm. This model is no longer offered by DOW.

1 x LCD TFT Panel
WVGA 16/9 Liquid Crystal Display

1500
200:1
7,5000 min. Lumen
667 Lux (bei 200 cm Screen)
200:1
3,373 min. Lumen

WVGA 800 x 480
384.000 Pixel
XGA 1024 x 768 compressed

Pal, SECAM, NTSC,
Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

270W Lamp

2000 h.

-

-

-

-

-

-

D-sub 15 pin in
S-Video in
Cinch Video in

-

-

345 x 105 x 255 mm (13,6"x4,1"x10") 9,24 L/dm³

-

5,80 kg / 12,79 lbs.

-


-

-

62 fL / max. 393 cm screen width
212 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

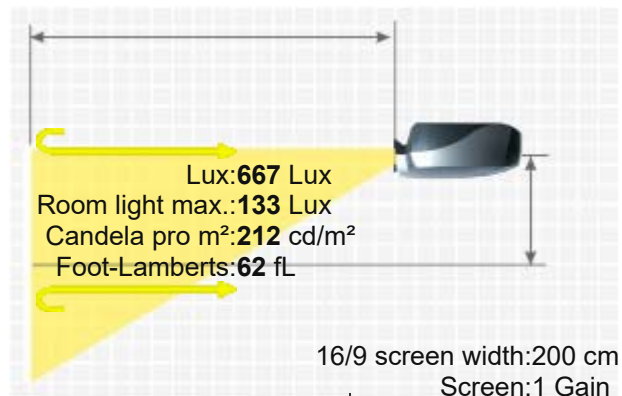



HCinema

<https://www.projector-database.com/pro/dowuc300-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.