ImagePro 8063
Portable Powerful LCD Projector

- 2000 lumen brightness
- SVGA resolution
- Easy to transport, only 5.5 lbs.
- Full set of features, 2 computer & 3 video inputs
- Monitor loopthrough
- Remote mouse control
- Vertical Keystone Correction
- Progressive Scan
- HDTV ready

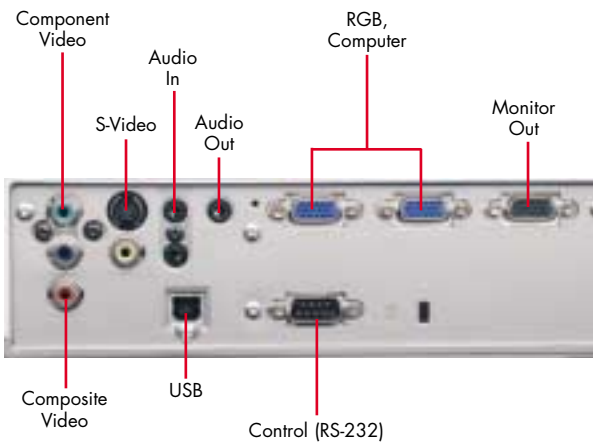

8063

DUKANE

ImagePro 8063
Premium-quality LCD projector

A new way of thinking about projection

The Dukane ImagePro 8063 is an ultra-projector that makes presentation setup fast and easy. It is simple to use, transport, and can be setup in a minute.

This full-featured LCD projector is ideal for classrooms, conference rooms or other locations where a bright image is required. Use it as a portable or mount it on the ceiling.

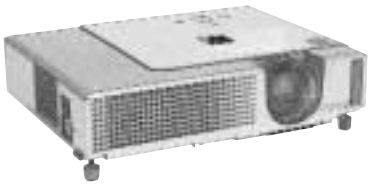

Key features:

- SVGA (800 x 600) resolution
- 2000 ANSI Lumens of brightness
- Vibrant rich colored images
- Easy carry 5.5 lbs.
- Flexibility with 2 computer and 3 video inputs
- Full function remote with mouse/cursor control
- "Custom Image" for your startup and blank screens
- Progreesive scan
- HDTV compatiable
- "Silent Running" so you hear only your message
- Vertical keystone correction
- Five Year Warranty and 1 Year Peace of Mind Service

8063 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min	Max
Inches	Inches	Inches	Inches
30	24	35	42
60	48	72	85
80	64	96	114
100	80	120	143
120	96	144	172
150	120	181	216
200	160	242	288
300	240	363	433

Throw ratio 1.5-1.8:1 (distance:width)

Specifications

Image Element	0.7" polysilicon active-matrix TFT x3
Brightness	2000 ANSI lumens (1600 lumens in Whisper Mode)
Resolution	800 x 600 pixels (H X V)
Contrast	400:1
Scanning Frequency	fh 15-91 kHz, fv 50-120 Hz
Lens	Manual zoom (F1.7 – 1.9), 1.2X
Lens Throw Ratio	1.5:1 – 1.8:1 throw distance to image width
Keystone Correction	Digital, vertical +/-15 deg
Aspect Ratio	4:3, 16:9, selectable
Computer	SVGA, VGA, XGA, SXGA, UXGA
Compatibility	Compressed PC and Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, Component, SECAM, HDTV (1080i,
Component Video,	720p, 575i, 480i/p)
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	165W UHB
Lamp Life	2000 hours (typical)
Audio	1 speaker 1 watt
Throw Distance	35" to 433"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB, 15 pin D-sub
Inputs, Audio	(2) Stereo mini jack
Outputs, Audio	(1) Stereo mini jack
Outputs, Monitor	RGB, 15 pin D-sub
Outputs,Control	RS-232, 9 pin D-sub USB Mouse control
Security	Kensington lock slot
Fan Level	37dB, ultra quiet 32dB in Whisper Mode
Operating Temperature	32-95 deg F
Power	AC 100-120V, AC220-240V 50/60 Hz, 240 watt
Size (WxHxD)	11.7" x 2.5" x 9.2"
Weight	5.5 lbs.
Shipping Weight	15 lbs.
Carton Size	16" x 14" x 12"
Accessories Included	Remote control, batteries, power RGB cable, operators manual and soft carry case.
Safety	UL/C-UL, FCC Class B
Optional Accessories	Lamp 456-8063, rolling briefcase 185-406

DUKANE

Audiovisual Products
2900 Dukane Drive
St. Charles, Illinois 60174
www.dukcorp.com/av

Toll-free: 800-676-2485
Fax: 630-584-5156
E-mail: avsales@dukcorp.com

Five (5) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 24 month *Peace-of-Mind Loaner Program.*

5YR

#11661-J-04

ImagePro is a registered trademark of Dukane Corporation