

Dukane ImagePro 6762WU

DUKANE IMAGEPRO 6762WU



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

The stationary Dukane ImagePro 6762WU 3D LCD projector has 6200 Ansi lumens, a contrast of 6000:1 and a WUXGA 1920 x 1200 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. 6200 Ansi lumens ensure that a picture width of 800 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 533 cm. If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. Furthermore, the projector can play 1080P and 4K (compressed) as well as 3D without any problems, meaning that all Blu-ray formats currently available can be recognized by the projector. On the market since 2015, the model is no longer offered by the manufacturer Dukane.



3 x 0,76" LCD TFT Panel mit MLA

WUXGA 16/9 Liquid Crystal Display with Micro Lense Array

Projector

6200

6000:1 full on/off

1,0333 min. Lumen

Screen

Vert.: +50% -10% Hori.: +/-30% manuell

WUXGA 1920 x 1200

2.304.000 Pixel

HD4K 4096 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the

conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

350 / 264W im Eco Mode Lamp

3000 h. 4000 h. in Eco Mode

-

Manual

Manual

optional

optional

1 x 10W

2 x HDMI in 1 x out

D-sub 15 pin in

5 x BNC RGBHV in

USB Typ A in


RS232C Din 9 pin in

Screen

2756 Lux (bei 200 cm Screen)

6000:1 full on/off

0,46 min. Lumen

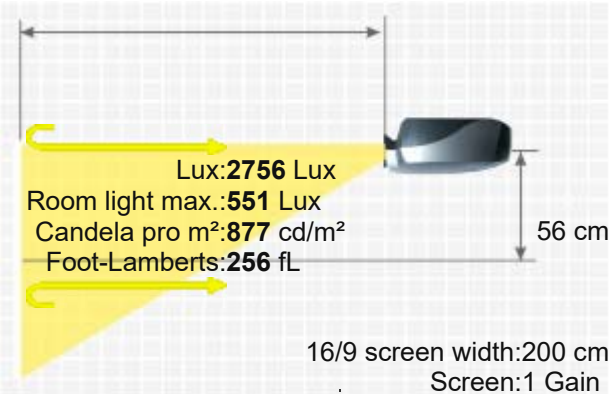

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Mini Jack Audio in und out
RJ45 mit HDBaseT in
Yes
460 / 362W in Eco Mode
499 x 164 x 366 mm (19,6"x6,5"x14,4") 29,95 L/dm³
39 / 33 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

8,40 kg / 18,52 lbs.
Vert.: +/-40°
Hori.: +/-40°
-
H-sync: 15-108 kHz
V-sync: 48-120 Hz
256 fL / max. 800 cm screen width
877 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Direkt Power Off
 - Lens shift Funktion manuell
 - Freeze
 - Blackboard Modus
 - User logo
 - Eco Mode
 - Warping
 - Edge Blending
 - Password protection
 - PJLink™
 - Lan network compatible.
 - Crestron®-Software compatible.
 - DICOM Simulation
 - Picture-in-picture
 - Picture-by-picture

Status
Data

Optional Lenses
2015 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2015-07-16 15:24:33

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro6762wu-en.html>

