

Dukane ImagePro 7500

DUKANE IMAGEPRO 7500



Brief Introduction

Beta 2.5

The Dukane ImagePro 7500 LCD projector has 500 Ansi lumens, a contrast of 150:1 and an SVGA 800 x 600 resolution. The projector will be able to illuminate a picture width of 195 cm well. However, if room light is available, the picture width should ideally not exceed 130 cm. The model built in 1999 is no longer offered by Dukane.



3 x 1,3" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

500

150:1 full on/off

3,3333 min. Lumen

-

SVGA 800 x 600

480.000 Pixel

NTSC, PAL, SECAM

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very narrow picture width and rooms with very little light.

250W Metaldampflampe

Articel Nr.: 456-200

2000 h.

-

Manual

Manual

-

-

2 x 1,5W

S-Video: (1) Mini DIN 4-pin

Video: (1) RCA jack

D-sub 15pin in

PS/2

-

360W

-

-

-

-

85%

H-sync: 15,6-57,0 kHz

V-sync: 50-85 Hz

15 fL / max. 195 cm screen width

51 cd/m²

-

1999 Discontinued (EOL) // Last update of the data: 2023-08-04

162 Lux (bei 203 cm Screen)

150:1 full on/off

1.102 min. Lumen

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-


-

-

-

-

-

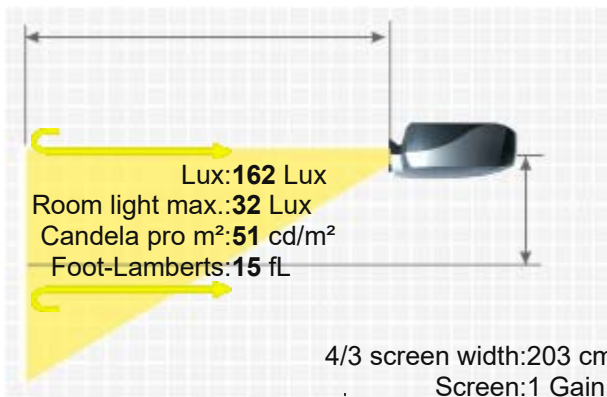

4/3 screen width: 203 cm
Screen: 1 Gain



HCinema

<https://www.projector-database.com/pro/dukaneimagepro7500-en.html>

More Details

